

RD3W5C

3 Wattage and 5 CCT Selectable Downlight



FEATURES:

- Commercial Recessed LED Downlight
- 3 Wattage Output Selectable
- 5 CCT Selectable 27/30/35/40/50/K
- Universal Voltage 120-277V
- 0-10V Dimming, 1-100% dim range
- For Retrofit or New Construction, convenient and easy installation
- 50,000H @ L70 Long Lifetime




ORDERING GUIDE Example: RD3W5C-413-85C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RD3W5C				
4: 4"	13 : 7/10/13 Selectable	8: 80	UV : 120~277V	WH: White
6: 6"	20 : 10/15/20 Selectable	5C: 5CCT Selectable	10V: 0-10V Dimming	
8: 8"	50 : 17/24/30 Selectable	2700K/	Universal Voltage	
10: 10"	30 : 22/30/38 Selectable	3000K/		
		3500K/		
		4000K/		
		5000K		



RDIJ5C

Integrated J-Box 5 CCT Selectable Downlight



FEATURES:

- Residential Recessed LED Downlight
- With Integrated J-Box, no frame-in or housing required
- 5 CCT Selectable 27/30/35/40/50/K
- 120V Line Voltage Driver-On-Board Solution
- Triac Dimming, 10-100% dim range
- For Retrofit, convenient and easy installation
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDIJ5C-410-85C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RDIJ5C				
4: 4"	10: 10W	8: 80	LB: 120V	WH: White
6: 6"	15: 15W	5C: 5CCT Selectable	TR: Triac Dimming	
		2700K/	Line Voltage	
		3000K/	DOB Solution	
		3500K/		
		4000K/		
		5000K		

RDR3W5C

Retrofit 3 Wattage and 5 CCT Selectable Downlight



FEATURES:

- Retrofit Recessed LED Downlight
- 3 Wattage & 5 CCT Selectable
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dimming, 1-100% dim range
- Replaceable Trim for different finish
- Supply with E26 Adapter
- For Retrofit quick installation
- 50,000H @ L70 Long Lifetime




ORDERING GUIDE Example: RDR3W5C-412-85C-LBTR-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH	
RDR3W5C					
4: 4"	12: 8/10/12 Selectable	8: 80	LB: 120V	TR: Triac Dimming	WH: White
6: 6"	18: 12/15/18 Selectable	9: 90	Line Voltage	DOB Solution	
		2700K/ 3000K/ 3500K/ 4000K/ 5000K			

RDER5C

ECO Retrofit 5 CCT Selectable Downlight

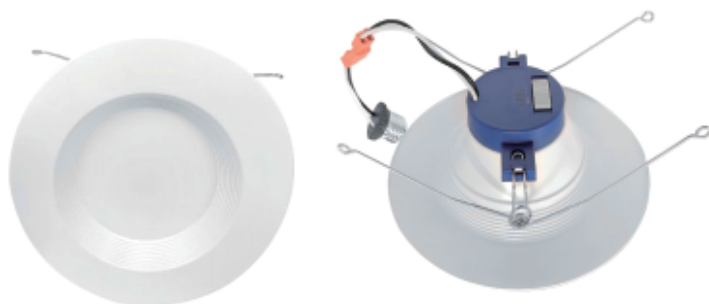

FEATURES:

- Retrofit Recessed LED Downlight
- 5 CCT Selectable
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dimming, 1-100% dim range
- Replaceable Trim for different finish
- Supply with E26 Adapter
- For Retrofit quick installation
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDER5C-410-85C-LBTR-WH

PART #	SIZE & WATTAGE (W)		CRI & CCT SELECTABLE (K)		INPUT (V) & CONTROL		FINISH
RDER5C							
	4: 4"	10: 10W	8: 80	5C: 5CCT Selectable	LB: 120V	TR: Triac Dimming	WH: White
	6: 6"	15: 15W	9: 90	2700K/ 3000K/ 3500K/ 4000K/ 5000K	Line Voltage DOB Solution		



RDEL5C

5 CCT Selectable Edgelite Slim Panel Downlight



FEATURES:

- Round Edgelite Slim Panel LED DownLight
- 5 CCT Selectable 27/30/35/40/50/K
- J-Box Remote, 120V Line Voltage, Triac Dimming, 10-100% dim range
- For Retrofit or New Construction, convenient and quick installation, Spring-action housing clips
- Suitable for using in Wet location, IC & Air-tight application
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDEL5C-409-85C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RDEL5C				
	4: 4" 09: 9W	9: 90 5C: 5CCT Selectable	LB: 120V TR: Triac Dimming	WH: White
	6: 6" 12: 12W	2700K/ 3000K/ 3500K/ 4000K/ 5000K	Line Voltage DOB Solution	


RDSE5C

5 CCT Selectable Edgelite Square Panel Downlight



FEATURES:

- Square Edgelite Slim Panel LED DownLight
- 5 CCT Selectable 27/30/35/40/50/K
- J-Box Remote, 120V Line Voltage, Triac Dimming, 10-100% dim range
- For Retrofit or New Construction, convenient and quick installation, Spring-action housing clips
- Suitable for using in Wet location, IC & Air-tight application
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDSE5C-410-85C-UV10V-WH

PART #	SIZE & WATTAGE (W)		CRI & CCT SELECTABLE (K)		INPUT (V) & CONTROL		FINISH
RDSE5C							
	4: 4"	10: 10W	9: 90	5C: 5CCT Selectable	LB: 120V	TR: Triac Dimming	WH: White
	6: 6"	15: 15W		2700K/ 3000K/ 3500K/ 4000K/ 5000K	Line Voltage DOB Solution		