

# SR2835

LED Flexible Strip Regular Hot Sell Series




## FEATURES:

- Regular Hot Sell Flexible LED Strip
- High CRI >90, SMD 2835 LED
- High luminous efficiency, up to 100lm/W
- High color consistency, SDCM<5, optional for SDCM<3
- Beam Angle 120°
- Durable 2oz Rolled Copper FPC
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



## DIMENSION

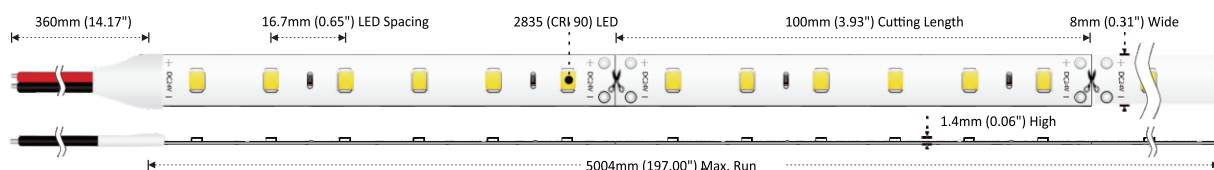

## ORDERING GUIDE Example: SR2835-6024-0508-924

| PART # | # OF LEDS & INPUT       | POWER & PCB WIDTH               | CRI & CCT (K)                                                          |
|--------|-------------------------|---------------------------------|------------------------------------------------------------------------|
| SR2835 | <input type="text"/>    | <input type="text"/>            | <input type="text"/>                                                   |
|        | 60: 60 LEDs/m 24: 24Vdc | 05: 4.8W/m 8: 8mm<br>(1.46W/ft) | 9: 90 24: 2400K/ 27: 2700K/ 30: 3000K/ 40: 4000K/ 50: 5000K/ 60: 6000K |

# SR2835

LED Flexible Strip Regular Hot Sell Series




## FEATURES:

- Regular Hot Sell Flexible LED Strip
- High CRI >90, SMD 2835 LED
- High luminous efficiency, up to 100lm/W
- High color consistency, SDCM<5, optional for SDCM<3
- Beam Angle 120°
- Durable 2oz Rolled Copper FPC
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



## DIMENSION

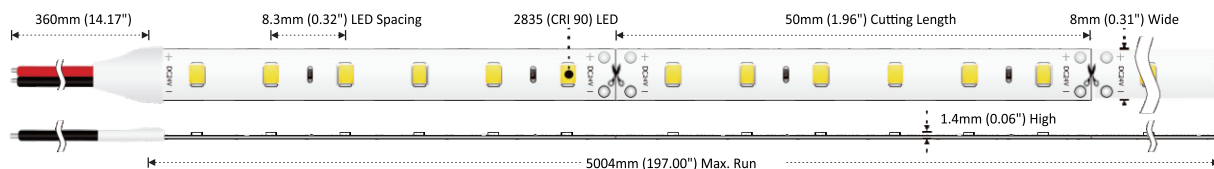


## ORDERING GUIDE Example: SR2835-12024-1008-924

| PART # | # OF LEDS & INPUT         | POWER & PCB WIDTH               | CRI & CCT (K)                                                          |
|--------|---------------------------|---------------------------------|------------------------------------------------------------------------|
| SR2835 | <input type="text"/>      | <input type="text"/>            | <input type="text"/>                                                   |
|        | 120: 120 LEDs/m 24: 24Vdc | 10: 9.6W/m 8: 8mm<br>(2.93W/ft) | 9: 90 24: 2400K/ 27: 2700K/ 30: 3000K/ 40: 4000K/ 50: 5000K/ 60: 6000K |

## SR2835

LED Flexible Strip High Density High Brightness

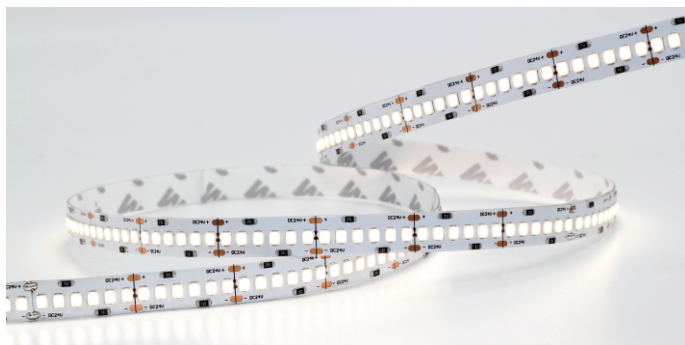


### FEATURES:

- Regular High Density Flexible LED Strip
- High CRI >90, SMD 2835 LED
- High luminous efficiency, up to 100lm/W
- High color consistency, SDCM<5, optional for SDCM<3
- Beam Angle 120°
- Durable 3oz Rolled Copper FPC
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



### DIMENSION

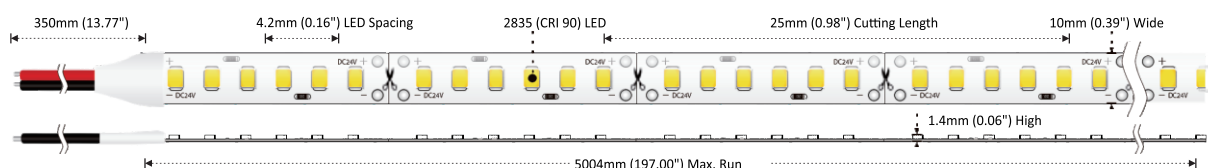

### ORDERING GUIDE Example: SR2835-24024-1910-924

| PART # | # OF LEDS & INPUT         | POWER & PCB WIDTH               | CRI & CCT (K)                                                          |
|--------|---------------------------|---------------------------------|------------------------------------------------------------------------|
| SR2835 | <input type="text"/>      | <input type="text"/>            | <input type="text"/>                                                   |
|        | 240: 240 LEDs/m 24: 24Vdc | 19: 19.2W/m 10: 10mm (5.85W/ft) | 9: 90 24: 2400K/ 27: 2700K/ 30: 3000K/ 40: 4000K/ 50: 5000K/ 60: 6000K |

## SD2835

LED Flexible Strip Double Row High Brightness




### FEATURES:

- Double Row High Brightness Flexible LED Strip
- High CRI >90, SMD 2835 LED
- High luminous efficiency, up to 100lm/W
- High color consistency, SDCM<5, optional for SDCM<3
- Beam Angle 120°
- Durable 3oz Rolled Copper FPC
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



### DIMENSION

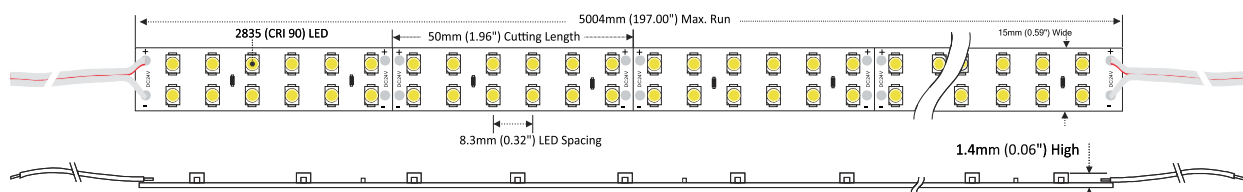

### ORDERING GUIDE Example: SD2835-24024-1915-927

| PART # | # OF LEDS & INPUT         | POWER & PCB WIDTH               | CRI & CCT (K)                                               |
|--------|---------------------------|---------------------------------|-------------------------------------------------------------|
| SD2835 | <input type="text"/>      | <input type="text"/>            | <input type="text"/>                                        |
|        | 240: 240 LEDs/m 24: 24Vdc | 19: 19.2W/m 15: 15mm (5.85W/ft) | 9: 90 27: 2700K/ 30: 3000K/ 40: 4000K/ 50: 5000K/ 60: 6000K |

# SH2835


## LED Flexible Strip High Efficient Series

### FEATURES:

- High Efficient Flexible LED Strip
- 8LEDs/section high efficiency, up to **165lm/W**
- High CRI >90, SMD 2835 LED
- High color consistency, SDCM<5, optional for SDCM<3
- Beam Angle 120°
- Durable 2oz Rolled Copper FPC
- IP20, OR IP65 / IP67 waterproof version available
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



### DIMENSION

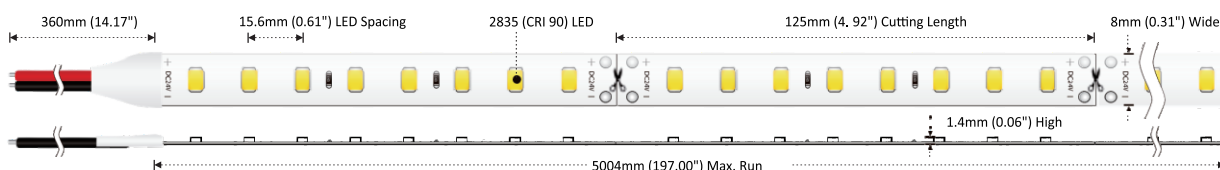

### ORDERING GUIDE Example: SH2835-6424-0508-927

| PART # | # OF LEDS & INPUT                    | POWER & PCB WIDTH               | CRI & CCT (K)                                                |
|--------|--------------------------------------|---------------------------------|--------------------------------------------------------------|
| SH2835 | <input type="text"/>                 | <input type="text"/>            | <input type="text"/>                                         |
|        | 64: 64 LEDs/m 24: 24Vdc<br>12: 12Vdc | 05: 4.8W/m 8: 8mm<br>(1.46W/ft) | 9 : 90 27: 2700K/ 30: 3000K/ 40: 4000K/ 50: 5000K/ 60: 6000K |

# SH2835


## LED Flexible Strip High Efficient Series

### FEATURES:

- High Efficient Flexible LED Strip
- 8LEDs/section high efficiency, up to **165lm/W**
- High CRI >90, SMD 2835 LED
- High color consistency, SDCM<5, optional for SDCM<3
- Beam Angle 120°
- Durable 2oz Rolled Copper FPC
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



### DIMENSION

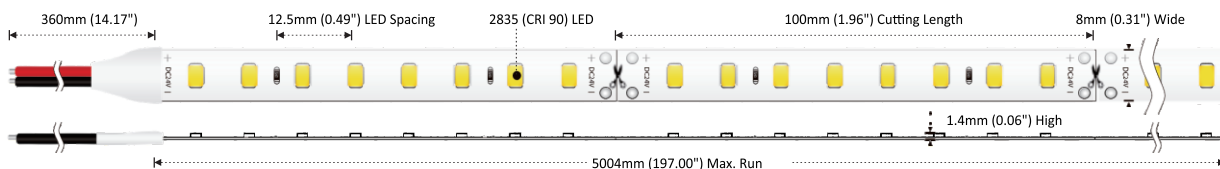

### ORDERING GUIDE Example: SH2835-8024-1008-927

| PART # | # OF LEDS & INPUT                    | POWER & PCB WIDTH               | CRI & CCT (K)                                                |
|--------|--------------------------------------|---------------------------------|--------------------------------------------------------------|
| SH2835 | <input type="text"/>                 | <input type="text"/>            | <input type="text"/>                                         |
|        | 80: 80 LEDs/m 24: 24Vdc<br>12: 12Vdc | 10: 9.6W/m 8: 8mm<br>(2.93W/ft) | 9 : 90 27: 2700K/ 30: 3000K/ 40: 4000K/ 50: 5000K/ 60: 6000K |

## SC2835


LED Flexible Strip High Efficient High Brightness

### FEATURES:

- High Efficient High Brightness Flexible LED Strip
- 8LEDs/section high efficiency, up to **165lm/W**
- High CRI >90, SMD 2835 LED
- High color consistency, SDCM<5, optional for SDCM<3
- Beam Angle 120°
- Durable 2oz Rolled Copper FPC
- IP20, OR IP65/IP67 waterproof version available
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



### DIMENSION

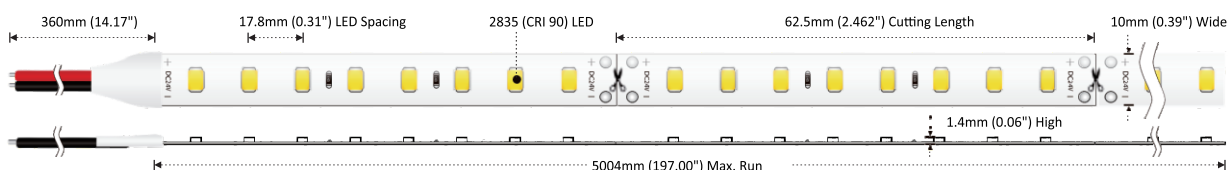

### ORDERING GUIDE Example: SH2835-12824-1410-927

| PART # | # OF LEDS & INPUT         | POWER & PCB WIDTH               | CRI & CCT (K)                                                |
|--------|---------------------------|---------------------------------|--------------------------------------------------------------|
| SH2835 | <input type="text"/>      | <input type="text"/>            | <input type="text"/>                                         |
|        | 128: 128 LEDs/m 24: 24Vdc | 14: 14.4W/m 10: 10mm (1.46W/ft) | 9 : 90 27: 2700K/ 30: 3000K/ 40: 4000K/ 50: 5000K/ 60: 6000K |

## SH2835


LED Flexible Strip High Efficient High Density Series

### FEATURES:

- High Efficient High Brightness Flexible LED Strip
- 8LEDs/section high efficiency, up to **165lm/W**
- High CRI >90, SMD 2835 LED
- High color consistency, SDCM<5, optional for SDCM<3
- Beam Angle 120°
- Durable 2oz Rolled Copper FPC
- IP20, or IP65 / IP67 waterproof version available
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



### DIMENSION

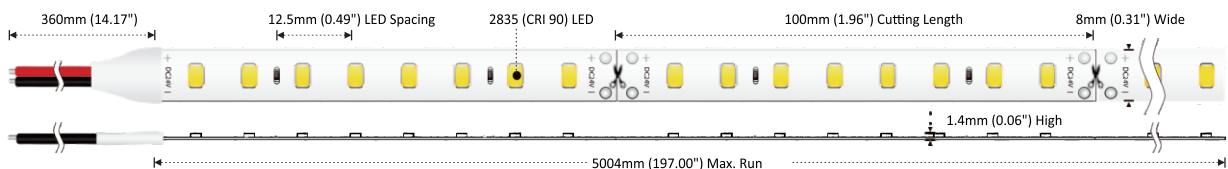

### ORDERING GUIDE Example: SH2835-16024-1910-927


| PART # | # OF LEDS & INPUT         | POWER & PCB WIDTH               | CRI & CCT (K)                                                |
|--------|---------------------------|---------------------------------|--------------------------------------------------------------|
| SH2835 | <input type="text"/>      | <input type="text"/>            | <input type="text"/>                                         |
|        | 160: 160 LEDs/m 24: 24Vdc | 19: 19.2W/m 10: 10mm (5.85W/ft) | 9 : 90 27: 2700K/ 30: 3000K/ 40: 4000K/ 50: 5000K/ 60: 6000K |

### FEATURES:

- RGBW Multi-color Flexible LED Strip
- 4-in-1 SMD 5050 LED
- High luminous efficiency, up to 100lm/W
- High color consistency
- Beam Angle 120°
- Durable 2oz Rolled Copper FPC
- IP20, OR IP65/IP67 waterproof version available
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



### DIMENSION

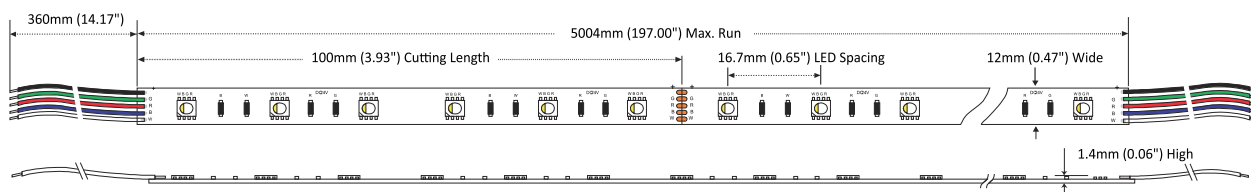

### ORDERING GUIDE Example: SRGBW-6024-1912


| PART # | # OF LEDS & INPUT       | POWER & PCB WIDTH               | Multi-colors Wavelength (nm)/CCT (K)                                                            |
|--------|-------------------------|---------------------------------|-------------------------------------------------------------------------------------------------|
| SRGBW  | <input type="text"/>    | <input type="text"/>            | <input type="text"/>                                                                            |
|        | 60: 60 LEDs/m 24: 24Vdc | 19: 19.2W/m 12: 12mm (5.85W/ft) | RGBW : R 615~625nm & G 520~530nm & B 460~470nm & W 2400K/2700K/3000K/4000K/5000K/6000K optional |

### FEATURES:

- RGBWW Multi-color Flexible LED Strip
- 5-in-1 SMD5050 LED
- High color consistency
- Beam Angle 120°
- Durable 2oz Rolled Copper FPC
- IP20, OR IP65/IP67 waterproof version available
- 5-meter roll electrostatic bag package
- 50,000H @L70 long lifetime



### DIMENSION

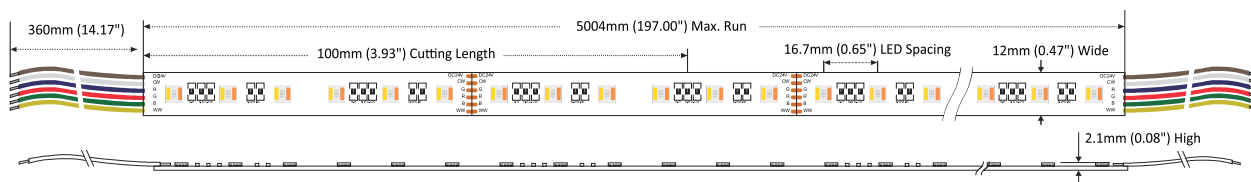

### ORDERING GUIDE Example: SRGBWW-6024-2412

| PART # | # OF LEDS & INPUT       | POWER & PCB WIDTH             | Multi-colors Wavelength (nm)/CCT (K)                               |
|--------|-------------------------|-------------------------------|--------------------------------------------------------------------|
| SRGBWW | <input type="text"/>    | <input type="text"/>          | <input type="text"/>                                               |
|        | 60: 60 LEDs/m 24: 24Vdc | 24: 24W/m 12: 12mm (7.32W/ft) | RGBWW : R 615~625nm & G 520~530nm & B 460~470nm & WW 2400K & 6000K |