


WPM2

LED Wall Pack Mini Slim



FEATURES:

- Robust die-cast aluminum housing, elegant slim design Mini Slim Wall Pack
- High Transmission Glass Diffuser - White or Frosted optional
- Low-watt consumption with high-efficient LEDs
- 120V Line Voltage, Driver-On-Board Solution
- IP65 Suitable for wet location
- 50,000H @L70 long lifetime



ORDERING GUIDE Example: WPM2-06-830-LB-BZ

PART #	WATTAGE & LUMEN & EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WPM2				
	06 : 6W 600LM 100lm/W	8 : 80 30: 3000K	LB : 120V Line Voltage Driver-On Board	BZ: Bronze
	09 : 9W 900LM 100lm/W	40: 4000K		BK: Black
	12 : 12W 1200LM 100lm/W	50: 5000K		

WPM3

LED Wall Pack Mini Slim



FEATURES:

- Robust die-cast aluminum housing, elegant slim design Mini Slim Wall Pack
- High Transmission Plastic Diffuser - White or Frosted optional
- Low-watt consumption with high-efficient LEDs
- 120V Line Voltage, Driver-On-Board Solution
- IP65 Suitable for wet location
- 50,000H @L70 long lifetime



ORDERING GUIDE Example: WPM3-06-830-LBN-BZ

PART #	WATTAGE & LUMEN & EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WPM3				
	06 : 6W 600LM 100lm/W	8 : 80 30: 3000K	LB : 120V Line Voltage Driver-On Board	BZ: Bronze
	09 : 9W 900LM 100lm/W	40: 4000K	P: Photocell	BK: Black
	12 : 12W 1200LM 100lm/W	50: 5000K		


WPM4

LED Wall Pack Mini Slim



FEATURES:

- Robust die-cast aluminum housing, elegant slim design Mini Slim Wall Pack
- High Transmission Glass Diffuser - White or Frosted optional
- Low-watt consumption with high-efficient LEDs
- 120V Line Voltage, Driver-On-Board Solution
- IP65 Suitable for wet location
- 50,000H @L70 long lifetime



ORDERING GUIDE Example: WPM4-06-830-LB-BZ

PART #	WATTAGE & LUMEN & EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WPM4				
	06 : 6W 600LM 100lm/W	8 : 80 30: 3000K	LB : 120V Line Voltage Driver-On Board	BZ: Bronze
	09 : 9W 900LM 100lm/W	40: 4000K		BK: Black
	12 : 12W 1200LM 100lm/W	50: 5000K		

WPM5

LED Wall Pack Mini Slim



FEATURES:

- Weather resistant aluminum housing, elegant slim design Mini Slim Wall Pack
- High Transmission Glass Diffuser - White or Frosted optional
- Low-watt consumption with high-efficient LEDs
- 120V Line Voltage, Driver-On-Board Solution
- IP65 Suitable for wet location
- 50,000H @L70 long lifetime



ORDERING GUIDE Example: WPM5-08-830-UV10V-BZ

PART #	WATTAGE & LUMEN & EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WPM5				
	09 : 9W 900LM 100lm/W	8 : 80 30: 3000K	LB : 120V Line Voltage Driver-On Board	BZ: Bronze
	12 : 12W 1200LM 100lm/W	40: 4000K	TR: Triac Dimming	BK: Black
	15 : 15W 1500LM 100lm/W	50: 5000K		




UiLED Technology Ltd.
www.uiled.cn

C2314 Innovation Plaza, Pingshan Avenue, Shenzhen, 518118 China
Tel: (86) 8999 4991 Email: info@uiled.cn / sales@uiled.cn

WMD1

LED Wall Mount Designed Series

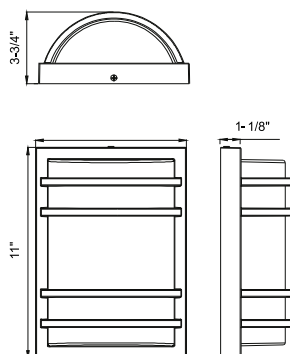

FEATURES:

- Weather resistant cold-rolled steel housing, slim designed decorative wall mount
- High Transmission PC Diffuser - White or Frosted optional
- Low-watt consumption with high-efficient LEDs
- 120V Line Voltage, Driver-On-Board Solution
- Suitable for wet location
- 50,000H @L70 long lifetime




ORDERING GUIDE Example: WMD1-09-730-LBN-BZ

PART #	WATTAGE & LUMEN & EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WMD1				
	09 : 9W 900LM 100lm/W	8 : 80 30 : 3000K	LB : 120V Line Voltage	BZ : Bronze
	12 : 12W 1200LM 100lm/W	40 : 4000K	Driver-On Board	N : Non Dimming
	15 : 15W 1500LM 100lm/W	50 : 5000K		TR : Triac Dimming
		3C : 3000/4000/5000K Selectable		BK : Black

WMD2

LED Wall Mount Designed Series

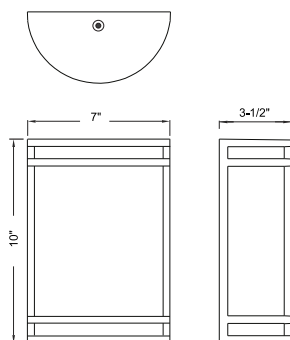

FEATURES:

- Weather resistant cold-rolled steel housing, slim designed decorative wall mack
- Diffuser material optional with Plastic or Glass - White or Frosted
- Low-watt consumption with high-efficient LEDs
- 120V Line Voltage, Driver-On-Board Solution
- Suitable for wet location
- 50,000H @L70 long lifetime




ORDERING GUIDE Example: WMD2-06-830-LBN-BZ

PART #	WATTAGE & LUMEN & EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WMD2				
	06 : 6W 420LM 70lm/W	8 : 80 30 : 3000K	LB : 120V Line Voltage	BZ : Bronze
	09 : 9W 630LM 70lm/W	40 : 4000K	Driver-On Board	N : Non Dimming
	12 : 12W 840LM 70lm/W	50 : 5000K		TR : Triac Dimming
	15 : 15W 1050LM 70lm/W	3C : 3000/4000/5000K Selectable		BK : Black

WMD3

LED Wall Mount Designed Series

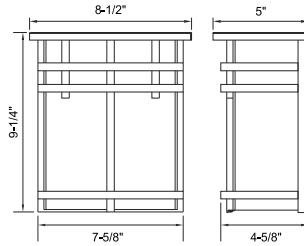

FEATURES:

- Robust aluminum housing, modern designed LED Wall Mount Fixture
- High transmission acrylic diffuser - white or frosted optional
- Low-wattage consumption with highly efficient LEDs Engine
- 120V Line Voltage, Driver-On-Board Solution
- Suitable for wet location
- 50,000H @L70 long lifetime




ORDERING GUIDE Example: WMD3-09-730-LB-BZ

PART #	SIZE & WATTAGE & LUMEN	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WMD3				
06 : 6W	420LM 70lm/W	8 : 80 30: 3000K	LB : 120V Line Voltage	BN: Brushed Nickel
09 : 9W	630LM 70lm/W	40: 4000K	Driver-On Board	PI: Photocell & PIR Sensor
12 : 12W	840LM 70lm/W	50: 5000K		ORB: Oil Rubbed Bronze
				BK: Black

WMD4

LED Wall Mount Designed Series

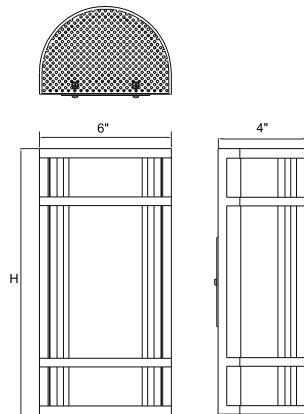

FEATURES:

- Robust aluminum housing, modern designed LED Wall Mount Fixture
- High transmission acrylic diffuser - white or frosted optional
- Low-watt consumption with high-efficient LEDs Engine
- 120V Line Voltage, Driver-On-Board Solution
- Suitable for wet location
- 50,000H @L70 long lifetime




ORDERING GUIDE Example: WMD4-1212-830-LBN-BZ

PART #	SIZE & WATTAGE & LUMEN	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WMD4				
12: H 12"	12: 12W 840LM	8 : 80 30: 3000K	LB : 120V Line Voltage	BN: Brushed Nickel
18: H 18"	15: 15W 1050LM	40: 4000K	Driver-On Board	P: Photocell
18: H 18"	20: 20W 1400LM	50: 5000K		ORB: Oil Rubbed Bronze
24: H 24"	25: 25W 1750LM	3C : 3000/4000/5000K		BK: Black
24: H 24"	30: 30W 2100LM	Selectable		

WMD5

LED Wall Mount Designed Series

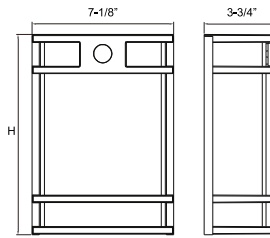

FEATURES:

- Robust aluminum housing, modern designed LED Wall Mount Fixture
- High transmission acrylic diffuser - white or frosted optional
- Low-wattage consumption with highly efficient LEDs Engine
- 120V Line Voltage, Driver-On-Board Solution
- Suitable for wet location
- 50,000H @L70 long lifetime




ORDERING GUIDE Example: WMD5-1009-830-LBN-BN

PART #	SIZE & WATTAGE & LUMEN	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WMD5				
	10: H 10" 09: 9W 630LM	8 : 80 30: 3000K	LB : 120V Line Voltage	BN: Brushed Nickel
	18 : H 18" 12: 12W 840LM	40: 4000K	Driver-On Board	PI: Photocell & PIR Sensor
	24 : H 24" 15: 15W 1050LM	50: 5000K		ORB: Oil Rubbed Bronze
		3C : 3000/4000/5000K Selectable		BK: Black

WMD6

LED Wall Mount Designed Series

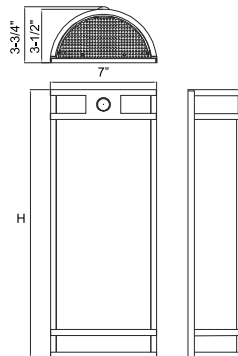

FEATURES:

- Robust aluminum housing, modern designed LED Wall Mount Fixture
- High transmission plastic diffuser - white or frosted optional
- Low-watt consumption with high-efficient LEDs Engine
- 120V Line Voltage, Driver-On-Board Solution
- Suitable for wet location
- 50,000H @L70 long lifetime



ORDERING GUIDE Example: WMD6-1006-830-LBN-BZ

PART #	SIZE & WATTAGE & LUMEN	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WMD6				
	12: H 12" 12: 12W 840LM	8 : 80 30: 3000K	LB : 120V Line Voltage	BN: Brushed Nickel
	18 : H 18" 15: 15W 1050LM	40: 4000K	Driver-On Board	PI: Photocell & PIR Sensor
	18 : H 18" 20: 20W 1400LM	50: 5000K		ORB: Oil Rubbed Bronze
	24 : H 24" 25: 25W 1750LM	3C : 3000/4000/5000K		BK: Black
	24 : H 24" 30: 30W 2100LM	Selectable		




UiLED Technology Ltd.
www.uiled.cn

C2314 Innovation Plaza, Pingshan Avenue, Shenzhen, 518118 China
Tel: (86) 8999 4991 Email: info@uiled.cn / sales@uiled.cn

WBK1

LED Slim Bulkhead Light



FEATURES:

- Robust die-cast aluminum housing, 3-3/4" W x 7-1/8" D x 5-3/4" H
- High impact, heat resistant borosilicate glass lens, frosted or white
- 120V Line Voltage, Driver-On-Board High efficient LEDs Engine
- Wall Mount or Ceiling Mount
- Suitable for wet location
- 50,000H @L70 long lifetime




ORDERING GUIDE Example: WBK1-06-830-LBN-BZ

PART #	WATTAGE & LUMEN & EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WBK1				
06 : 6W 600LM 100lm/W	8 : 80 3000K	LB : 120V Line Voltage Driver-On Board	N: Non Dimming	BZ: Bronze
09 : 9W 900LM 100lm/W	3000K			BK: Black
12 : 12W 1200LM 100lm/W	3000K			

WBK2

LED Slim Bulkhead Light



FEATURES:

- Robust die-cast aluminum housing, 3-3/4"W x 7-1/8"D x 9-3/4"H
- High impact, heat resistant borosilicate glass lens, frosted or white
- 120V Line Voltage, Driver-On-Board High efficient LEDs Engine
- Wall Mount or Ceiling Mount
- Suitable for wet location
- 50,000H @L70 long lifetime



ORDERING GUIDE Example: WBK2-06-830-LBN-BZ

PART #	WATTAGE & LUMEN & EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WBK2				
06 : 6W 600LM 100lm/W	8 : 80 3000K	LB : 120V Line Voltage Driver-On Board	N: Non Dimming	BZ: Bronze
09 : 9W 900LM 100lm/W	3000K			BK: Black
12 : 12W 1200LM 100lm/W	3000K			

WBK3

LED Bulkhead Light



FEATURES:

- Robust die-cast aluminum housing, 10-3/8" L x 10-3/8" W x 5-1/8" D
- High impact, heat resistant borosilicate glass lens
- 120V Line Voltage, Driver-On-Board High efficient LEDs Engine
- Wall Mount or Ceiling Mount
- Suitable for wet location
- 50,000H @L70 long lifetime



ORDERING GUIDE Example: WBK3-06-830-LB-BZ

PART #	WATTAGE & LUMEN & EFFICACY			CRI & CCT (K)		INPUT (V) & CONTROL		FINISH
WBK3								
	06: 6W	600LM	100lm/W	8 : 80	30: 3000K	LB : 120V Line Voltage	N: Non Dimming	BZ: Bronze
	09: 9W	900LM	100lm/W		40: 4000K	Driver-On Board	TR: Triac Dimming	BK: Black
	15 : 15W	1500LM	100lm/W		50: 5000K			
					3C : 3000/4000/5000K Selectable			

WBK4

LED Wall Pack Mini Slim



FEATURES:

- Robust die-cast aluminum housing, 10-5/8" L x 10-5/8" W x 4-5/8" D
- High impact, heat resistant borosilicate glass lens
- 120V Line Voltage, Driver-On-Board High efficient LEDs Engine
- Wall Mount or Ceiling Mount
- Suitable for wet location
- 50,000H @L70 long lifetime



ORDERING GUIDE Example: WBK4-09-830-LB-BZ

PART #	WATTAGE & LUMEN & EFFICACY			CRI & CCT (K)		INPUT (V) & CONTROL		FINISH
WBK4								
	09 : 9W	900LM	100 lm/W	8 : 80	3000K	LB : 120V Line Voltage	N: Non Dimming	BZ: Bronze
	12 : 12W	1200LM	100lm/W		4000K	Driver-On Board	TR: Triac Dimming	BK: Black
	15 : 15W	1500LM	100lm/W		5000K			