


PWL-J50

LED Portable Work Light

FEATURES:

- Patented Thin and tidy design with portable handle, contains **8.2ft** (2.5m) cord wrapped around.
- Robust foldable and mountable bracket, **185°** adjustable.
- Extra AC socket output version allows Max. **18 units** (900W) lamps chain connection, or power for external electrical tools and devices.
- 3-level Rocker Switch: Off/50%/100% brightness selectable
- IK07 Protection Rated Robust Housing.
- PWL-J50: IP65 Suitable for wet location.
- PWL-J550: IP20 AC Socket non-waterproof.
- 50,000H @ L70 Long Lifetime

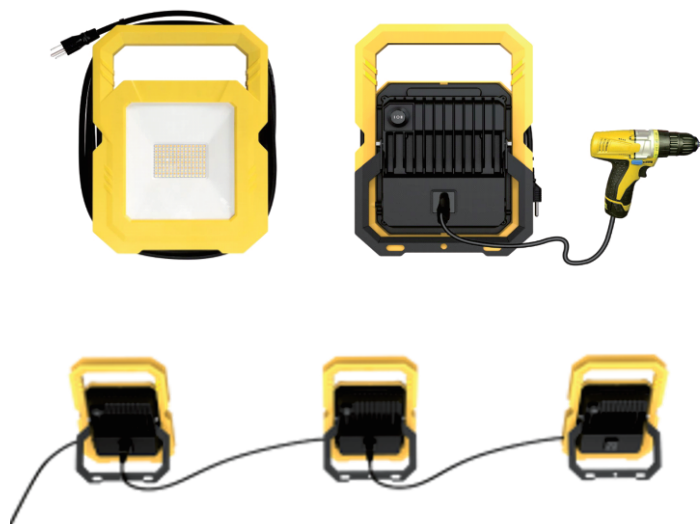

ORDERING GUIDE Example: PWL-J50-840-LB3S-N-AB


PART #	TYPE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	VERSION	FINISH
PWL					
	J : J type 50 : 50W	8 : 80 40: 4000K	LB : 120V Line Voltage	N : Non-AC Socket	AB: Amber&Black
	JS: JS type 50 : 50W	50: 5000K	3S: OFF/50%/100% Brightness Selectable	A: AC Socket	GB: Green&Black
		60: 6000K			

PWL-JB50

LED Portable Work Light

FEATURES:

- Patented Thin and tidy design with portable handle, contains **8.2ft** (2.5m) cord wrapped around.
- Robust foldable and mountable bracket, **185°** adjustable
- 8000mAh** Built-in Emergency Battery Pack, Lasts 15hrs @10% brightness of 300lm.
- 3-level Rocker Switch: Off/10%/100% selectable brightness.
- 100lm/W High brightness.
- IK07 Protection Rated Robust Housing.
- IP65 Suitable for damp location.
- 50,000H @ L70 Long Lifetime

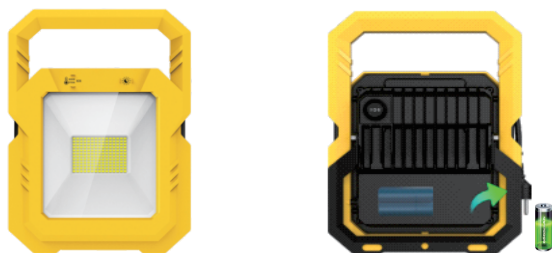

ORDERING GUIDE Example: PWL-JB50-840-LV3S-B-AB

PART #	TYPE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	VERSION	FINISH
PWL					
	JB : JB type 50 : 50W @120V 25W @Battery	8 : 80 40: 4000K 50: 5000K 60: 6000K	LB : 120V Line Voltage	B: Battery Backup	AB: Amber&Black
			3S: OFF/10%/100% Brightness Selectable		GB: Green&Black



UiLED Technology Ltd.
www.uiled.cn

C2314 Innovation Plaza, Pingshan Avenue, Shenzhen, 518118 China
Tel: (86) 8999 4991 Email: info@uiled.cn / sales@uiled.cn

PWL-JSU60

LED Portable Work Light

FEATURES:

- Patented Thin and tidy design with portable handle, contains **8.2ft** (2.5m) cord wrapped around.
- Robust foldable and mountable bracket, **185°** adjustable
- Extra AC socket output allows max. **15 units** (900W) lamps chain connection, or power for external electrical tools.
- **USB** output 5V, 2.0A for electrical devices battery charging.
- **Touch Switch:** On/Off; 10%/100% brightness Dimmable, and CCT 2700~6500K Adjustable.
- Lithium Battery backup: **8000mAh**.
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: PWL-JSU60-840-LBTR-BN

PART #	TYPE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	VERSION	FINISH
PWL					
	JSU : JSU type 60 : 60W @120V 25W @Battery 2.5W @ 10% Brightness	8 : 80 CT: 2700~6500K CCT Tunable	LB : 120V Line Voltage 3S: OFF/10%/100% Brightness Adjustable & SOS Mode	AU : AC Socket & USB 5.0V 2.0A & Battery Backup	AB: Amber&Black GB: Green&Black

Portable Work Light



UiLED Technology Ltd.
www.uiled.cn

C2314 Innovation Plaza, Pingshan Avenue, Shenzhen, 518118 China
Tel: (86) 8999 4991 Email: info@uiled.cn / sales@uiled.cn