



- Robust die-cast aluminum housing, elegant slim design Mini Slim Wall Pack
- High Transmission Glass Diffuser - White or Frosted optional
- Low-watt consumption with high-efficient LEDs
- 120V Line Voltage, Driver-On-Board Solution
- IP65 Suitable for wet location
- 50,000H @L70 long lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
WBK2-06	120	6	420	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	9-3/4"Lx3-3/4"Wx7-1/8"D
WBK2-09	120	9	630	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	9-3/4"Lx3-3/4"Wx7-1/8"D
WBK2-12	120	12	840	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	9-3/4"Lx3-3/4"Wx7-1/8"D

DIMENSION

Size (Inch)	WBK2
L	9-3/4"
W	3-3/4"
D	7-1/8"

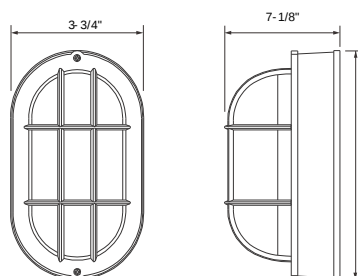

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WBK2-06	257x137x140mm	6	443x277x312mm		10030	65 CBM	
WBK2-09	257x137x140mm	6	443x277x312mm		10030	65 CBM	
WBK2-12	257x137x140mm	6	443x277x312mm		10030	65 CBM	