



- Weather resistant cold-rolled steel housing, slim designed decorative wall mount
- High Transmission Whit Acrylic Diffuser or Glass Diffuser
Low-watt consumption with high-efficient LEDs Module, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- IP65 Suitable for wet location
- 50,000H @L70 long lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
WMD2-06	120	6	420	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	10"H x 7"W x 3-1/2"D
WMD2-09	120	9	630	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	10"H x 7"W x 3-1/2"D
WMD2-12	120	12	840	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	10"H x 7"W x 3-1/2"D
WMD2-15	120	15	1050	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	10"H x 7"W x 3-1/2"D

DIMENSION

Size (Inch)	WMD2
H	10"
W	7"
D	3-1/2"

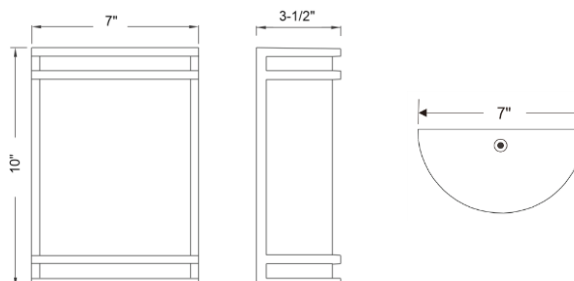

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WMD2-06	297x210x125mm	8	619x445x280mm		6648	65 CBM	
WMD2-09	297x210x125mm	8	619x445x280mm		6638	65 CBM	
WMD2-12	297x210x125mm	8	619x445x280mm		6638	65 CBM	
WMD2-15	297x210x125mm	8	619x445x280mm		6638	65 CBM	