



- Modern designed LED Wall Mount Fixture
- Robust aluminum housing
- High transmission acrylic diffuser - white or frosted optional
- Low-wattage consumption with highly efficient LEDs Module, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Suitable for wet location
- 50,000H @L70 long lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH
WMD4-1212	120	12	840	70	80	3000/4000/5000/3CCT Tunable	Non Dim.	Bronze/Black
WMD4-1815	120	15	1050	70	80	3000/4000/5000/3CCT Tunable	Non Dim.	Bronze/Black
WMD4-1820	120	20	1400	70	80	3000/4000/5000/3CCT Tunable	Non Dim.	Bronze/Black
WMD4-2430	120	30	2100	70	80	3000/4000/5000/3CCT Tunable	Non Dim.	Bronze/Black

DIMENSION

Size (Inch)	WMD4-12	WMD4-18	WMD4-24
H	12"	18"	24"
W	6"	6"	6"
D	4"	4"	4"

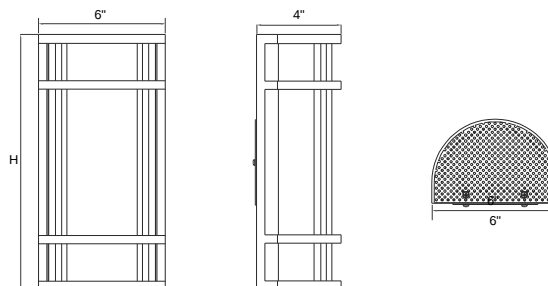

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WMD4-1212	312x159x115mm	4	325x337x255mm		8,600	65 CBM	
WMD4-1815	482x159x115mm	4	495x337x255mm		3,500	65 CBM	
WMD4-1820	482x159x115mm	4	495x337x255mm		3,500	65 CBM	
WMD4-2430	642x159x115mm	4	655x337x255mm		4,600	65 CBM	