



- Robust die-cast aluminum housing
- High impact, heat resistant borosilicate glass lens
- Low-wattage consumption with highly efficient LEDs Engine, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime



SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
WML1-06	120	6	420	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	11-1/2"Hx10"Wx 4-3/4"D
WML1-09	120	9	630	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	11-1/2"Hx10"Wx 4-3/4"D
WML1-12	120	12	840	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	11-1/2"Hx10"Wx 4-3/4"D

DIMENSION

Size (Inch)	WML1
H	11-1/2"
W	10"
D	4-3/4"

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WML1-06	342x304x171	6	628x533x362mm		3,169	65 CBM	
WML1-09	342x304x171	6	628x533x362mm		3,169	65 CBM	
WML1-12	342x304x171	6	628x533x362mm		3,169	65 CBM	



- Robust die-cast aluminum housing
- High transmittance Acrylic diffuser or Heat-resistant borosilicate glass diffuser optional
- Low-wattage consumption with highly efficient LEDs Engine, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime






SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH
WML2-06	120	6	420	70	80	3000/4000/5000	Triac Dim.	Bronze/Black
WML2-09	120	9	630	70	80	3000/4000/5000	Triac Dim.	Bronze/Black
WML2-12	120	12	840	70	80	3000/4000/5000	Triac Dim.	Bronze/Black

DIMENSION

Size (Inch)	WML2
H	9-3/4"
W	7-5/8"
D	4-1/8"



PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WML2-06	225x115x280mm	6	470x365x300mm		7,461	65 CBM	
WML2-06	225x115x280mm	6	470x365x300mm		7,461	65 CBM	
WML2-06	225x115x280mm	6	470x365x300mm		7,461	65 CBM	



- Robust die-cast aluminum housing
- High impact, heat resistant borosilicate glass lens
- Low-wattage consumption with highly efficient LEDs Engine, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Photocell optional
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime






SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH
WML3-06	120	6	420	70	80	3000/4000/5000	Non-Dim/ Photocell	ORB/ Black
WML3-09	120	9	630	70	80	3000/4000/5000	Non-Dim/ Photocell	ORB/ Black
WML3-12	120	12	840	70	80	3000/4000/5000	Non-Dim/ Photocell	ORB/ Black

DIMENSION

Size (Inch)	WML3
H	8-1/4"
W	4-5/8"
D	5-7/8"



PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WML3-06	365x203x241	6	385x629x502mm		3,159	65 CBM	
WML3-09	365x203x241	6	385x629x502mm		3,159	65 CBM	
WML3-12	365x203x241	6	385x629x502mm		3,159	65 CBM	



- Robust die-cast aluminum housing
- High impact, heat resistant borosilicate glass lens
- Low-wattage consumption with highly efficient LEDs Engine, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Photocell optional
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime





SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIFUSER
WML4-06	120	6	420	70	80	3000/4000/5000	Non-Dim/ Photocell	ORB/ Black	F- Frosted WC- Water Clear
WML4-09	120	9	630	70	80	3000/4000/5000	Non-Dim/ Photocell	ORB/ Black	F- Frosted WC- Water Clear
WML4-12	120	12	840	70	80	3000/4000/5000	Non-Dim/ Photocell	ORB/ Black	F- Frosted WC- Water Clear

DIMENSION

Size (Inch)	WML4
H	11"
W	6-1/2"
D	7-1/2"



PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN
WML4-06	239x191x340	6	498x415x360mm		5,161	65 CBM
WML4-09	239x191x340	6	498x415x360mm		5,161	65 CBM
WML4-12	239x191x340	6	498x415x360mm		5,161	65 CBM



- Robust die-cast aluminum housing, Down Light only
- High impact, Wheat resistant clear glass lens
- Low-wattage consumption with highly efficient COB LEDs Module, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dim, 10-100% dimming range
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	
WMC1-09D	120	9	420	100	80	3000/4000/5000/3CCT	Triac Dim	ORB/Black	
WMC1-09	120	9	630	100	80	3000/4000/5000	Non-Dim	ORB/Black	

DIMENSION

Size (Inch)	WMC1
H	6-1/4"
W	4-3/8"
D	5-5/8"
Dia.	3-1/8"

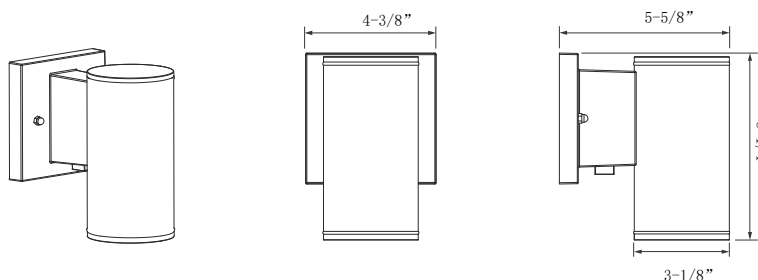

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WMC1-09D	153x116x180	12	490x482x200mm		16,259	65 CBM	
WMC1-09	153x116x180	12	490x482x200mm		16,259	65 CBM	



- Robust die-cast aluminum housing, Up & Down Light
- High impact, heat resistant clear glass lens
- Low-wattage consumption with highly efficient COB LEDs Module, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dim, 10-100% dimming range
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	
WMC2-1012	120	12	420	100	80	3000/4000/5000/3CCT	Triac Dim	ORB/Black	
WMC2-1414	120	14	630	100	80	3000/4000/5000/3CCT	Triac Dim	ORB/Black	

DIMENSION

Size (Inch)	WML1-10	WML1-14
H	10"	14"
W	4-3/8"	4-3/8"
D	5-5/8"	5-5/8"
Dia.	3-1/8"	3-1/8"

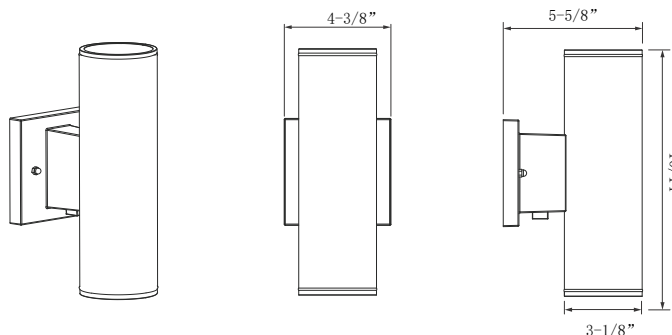

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WMC2-1012	153x116x278	6	490x482x298mm		10,912	65 CBM	
WMC2-1414	153x116x278	6	490x482x298mm		10,912	65 CBM	