

RD3W5C

3 Wattage and 5 CCT Selectable Downlight



FEATURES:

- Commercial Recessed LED Downlight
- 3 Wattage Output Selectable
- 5 CCT Selectable 27/30/35/40/50/K
- Universal Voltage 120-277V
- 0-10V Dimming, 1-100% dim range
- For Retrofit or New Construction, convenient and easy installation
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RD3W5C-413-85C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RD3W5C				
4: 4"	13 : 7/10/13 Selectable	8: 80 5C: 5CCT Selectable	UV : 120~277V 10V: 0-10V Dimming	WH: White
6: 6"	20 : 10/15/20 Selectable	2700K/3000K/3500K/4000K/5000K	Universal Voltage	
8: 8"	50 : 17/24/30 Selectable			
10: 10"	30 : 22/30/38 Selectable			



RDIJ5C

Integrated J-Box 5 CCT Selectable Downlight



FEATURES:


- Residential Recessed LED Downlight
- With Integrated J-Box, no frame-in or housing required
- 5 CCT Selectable 27/30/35/40/50/K
- 120V Line Voltage Driver-On-Board Solution
- Triac Dimming, 10-100% dim range
- For Retrofit, convenient and easy installation
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDIJ5C-410-85C-UV10V-WH


PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RDIJ5C				
4: 4"	10: 10W	8: 80 5C: 5CCT Selectable	LB: 120V TR: Triac Dimming	WH: White
6: 6"	15: 15W	2700K/3000K/3500K/4000K/5000K	Line Voltage DOB Solution	

Retrofit 3 Wattage and 5 CCT Selectable Downlight

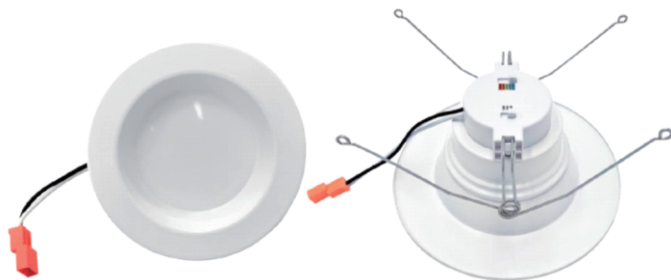RDR3W5C


FEATURES:


- Retrofit Recessed LED Downlight
- 3 Wattage & 5 CCT Selectable
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dimming, 1-100% dim range
- Replaceable Trim for different finish
- Supply with E26 Adapter
- For Retrofit quick installation
- 50,000H @ L70 Long Lifetime

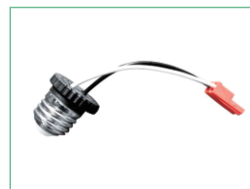

ORDERING GUIDE Example: RDR3W5C-412-85C-LBTR-WH


PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH	
RDR3W5C					
4: 4"	12: 8/10/12 Selectable	8: 80	LB: 120V	TR: Triac Dimming	WH: White
6: 6"	18: 12/15/18 Selectable	9: 90	Line Voltage	DOB Solution	
		5C: 5CCT Selectable			
		2700K/			
		3000K/			
		3500K/			
		4000K/			
		5000K			

ECO Retrofit 5 CCT Selectable Downlight

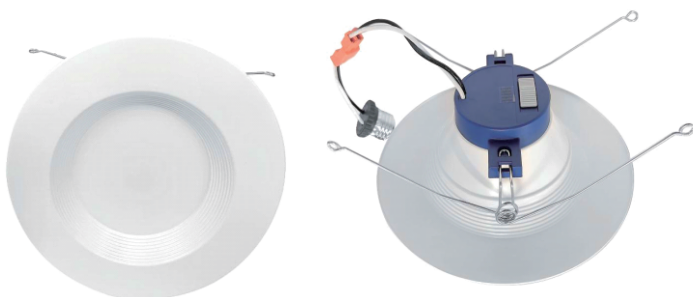RDER5C


FEATURES:

- Retrofit Recessed LED Downlight
- 5 CCT Selectable
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dimming, 1-100% dim range
- Replaceable Trim for different finish
- Supply with E26 Adapter
- For Retrofit quick installation
- 50,000H @ L70 Long Lifetime

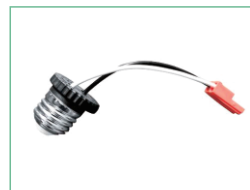

ORDERING GUIDE Example: RDER5C-410-85C-LBTR-WH

PART #	SIZE & WATTAGE (W)		CRI & CCT SELECTABLE (K)		INPUT (V) & CONTROL		FINISH
RDER5C							
	4: 4"	10: 10W	8: 80	5C: 5CCT Selectable	LB: 120V	TR: Triac Dimming	WH: White
	6: 6"	15: 15W	9: 90	2700K/ 3000K/ 3500K/ 4000K/ 5000K	Line Voltage DOB Solution		
							BK: Black