

- Wi-Fi or Bluetooth Wireless Smart Flush Mount 2-ring LED Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser create excellent light distribution and uniformity
- High efficiency 2835 LED module, up to 100lm/W
- PMW Dimming Smart Software Control
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
SFM2-1215	120	15	1200lm @2700K	80	90	RGB + Daylight White + Warm White	App/Voice Control	NICKEL / BLACK	12 Inch Dia.
SFM2-1220	120	20	1600lm @2700K	80	90	RGB + Daylight White + Warm White	App/Voice Control	NICKEL / BLACK	12 Inch Dia.
SFM2-1420	120	20	1600lm @2700K	80	90	RGB + Daylight White + Warm White	App/Voice Control	NICKEL / BLACK	14 Inch Dia.

KEY FEATURES

- Wi-Fi or Bluetooth wireless connection, no hub needed;
- Alexa, Google Assistant compatible (and more)
- Smart Control, On-off Scheduling, Timer Setting and color changing via APP or voice control devices (Alexa, HomeKit, Google Assistant, etc.
- White adjustable: 2700K-6500K and brightness dimmable 10%-100%
- RGB Color: Millions of RGB colors are changeable and the deepest, richest, and most beautiful tones can meet different lighting needs


LUMINAIRE PHOTOMETRIC

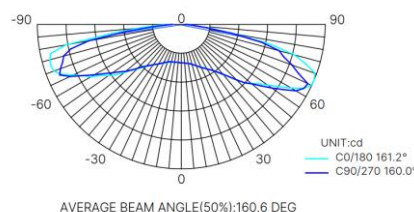

IESNA	LM-63-2002
Light source	LED
Input Watts	15
Total Lumens	1210 lm
Efficiency	80 LPW
Beam Angle	160.6 DEG

DIMENSION

Size (Inch)	SFM2-15	SFM2-14
Dia.	12	14
H	3-7/8"	3-7/8"

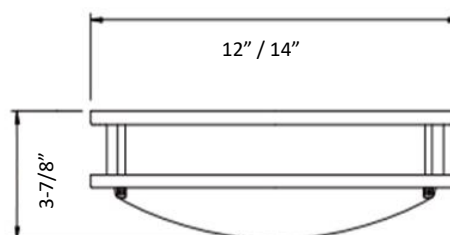

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
SFM2-1215	325x92x325mm	5	480x335x340mm	6.5 KG	6,150	65 CBM	7,995 KG
SFM2-1220	325x92x325mm	5	480x335x340mm	6.5 KG	6,150	65 CBM	7,995 KG
SFM2-1420	380x105x380mm	5	545x390x395mm	9.0 KG	4,000	65 CBM	7,200 KG



- Wi-Fi or Bluetooth Wireless Smart Flush Mount LED Ceiling Fixture
- Down Full White plus Upper Night Light
- High transmission durable PC diffuser create excellent light distribution and uniformity
- High efficiency DOB LED module, up to 100lm/W
- PMW Dimming Smart Software Control
- High Power Factor, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE COLOR & CCT (K)	DIMMING	FINISH	DIMENSION
SFMN-1224-1N-IR	120	24+1W	2400lm @4000K	100	80	2700-6500K Changeable +Warmwhite Night Light	IR Remote Control	WHITE / BLACK	12 Inch Dia.
SFMN-1224-1N-WB	120	24+1W	2400lm @4000K	100	80	2700-6500K Changeable +RGB Night Light	WiFi/BLU App/Voice Control	NICKEL / BLACK	12 Inch Dia.
SFMN-1224-TR	120	24	2400lm @4000K	100	80	2700/4000/5000K CCT Selectable (DIP Switch)	Triac Dim	NICKEL / BLACK	12 Inch Dia.

KEY FEATURES

- Wi-Fi or Bluetooth wireless connection, no hub needed;
- Alexa, Google Assistant compatible (and more)
- Smart Control, On-off Scheduling, Timer Setting and color changing via APP or voice control devices (Alexa, HomeKit, Google Assistant, etc).
- White adjustable: 2700K-6500K and brightness dimmable 10%-100%
- RGB Color: Millions of RGB colors are changeable and the deepest, richest, and most beautiful tones can meet different lighting needs



LUMINAIRE PHOTOMETRIC

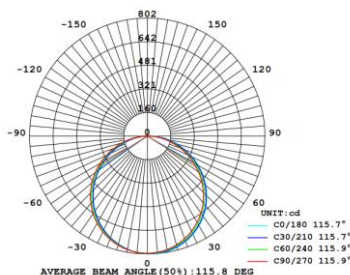

IESNA	LM-63-2002
Light source	LED
CCT	6500K
Input Watts	24W
Total Lumens	2390.4 lm
Efficiency	100 LPW
Beam Angle	115.8 DEG


DIMENSION

Size (Inch)	SFMN-1224
Dia.	12"
H	2"



PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
SFMN-1224	327x327x64mm	8	540x345x347mm	9.8 KG	8,000	65 CBM	9,800 KG



- Wi-Fi or Bluetooth Wireless Smart Flush Mount Decorative Drum LED Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser create excellent light distribution and uniformity
- High efficiency 2835 LED module, up to 100lm/W
- PMW Dimming Smart Software Control
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
SFMD-1215	120	12	1200lm @2700K	80	90	RGB + Daylight White + Warm White	App/Voice Control	NICKEL / BLACK	12 Inch Dia.
SFMD-1420	120	20	1600lm @2700K	80	90	RGB + Daylight White + Warm White	App/Voice Control	NICKEL / BLACK	14 Inch Dia.

KEY FEATURES

- Wi-Fi or Bluetooth wireless connection, no hub needed;
- Alexa, Google Assistant compatible (and more)
- Smart Control, On-off Scheduling, Timer Setting and color changing via APP or voice control devices (Alexa, HomeKit, Google Assistant, etc).
- White adjustable: 2700K-6500K and brightness dimmable 10%-100%
- RGB Color: Millions of RGB colors are changeable and the deepest, richest, and most beautiful tones can meet different lighting needs

LUMINAIRE PHOTOMETRIC

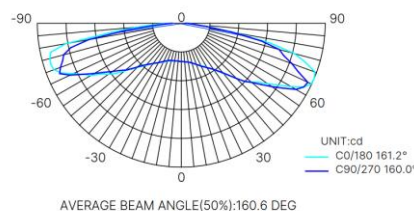

IESNA	LM-63-2002
Light source	LED
Input Watts	15
Total Lumens	1210 lm
Efficiency	80 LPW
Beam Angle	160.6 DEG

DIMENSION

Size (Inch)	SFMD-12	SFMD-14
Dia.	12	14
H	3-7/8"	3-7/8"



PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
SFMD-1215	325x92x325mm	5	480x335x340mm	6.5 KG	6,150	65 CBM	7,995 KG
SFMD-1420	380x105x380mm	5	545x390x395mm	9.0 KG	4,000	65 CBM	7,200 KG