



- Field selectable CCT & WATT
- Rugged die-casting housing with advanced thermal management
- High transmission lens
- Clear PC or Aluminum dome reflector available
- Multiple distribution 60/90/120°
- Universal voltage (120-277V) & High voltage (120-347V)
- IP65 Wet location rated
- ETL Listed, DLC qualified
- 5 years warranty



ORDERING GUIDE

PART #	INPUT (Vac)	OUTPUT (W)	LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	CERTIFICATION
RHBS-100	100-277	100-80-60 selectable	15000	150	>80	3000/4000/5000 selectable	0-10V	Black /White	ETL, DLC
RHBS-150	100-277	150-120-100 selectable	22500	150	>80	3000/4000/5000 selectable	0-10V	Black /White	ETL, DLC
RHBS-200	100-277	200-180-150 selectable	30000	150	>80	3000/4000/5000 selectable	0-10V	Black /White	ETL, DLC
RHBS-240	100-277	240-220-200 selectable	37500	150	>80	3000/4000/5000 selectable	0-10V	Black /White	ETL, DLC

ACCESSORIES OPTIONAL:



1/2" hook



U bracket



Al. Reflector




PC Reflector

- Easy plug & play PIR motion sensor, or microwave sensor with remote.
- Built-in BLE Mesh module, networked lighting control, optional with Tuya, Keilton, or Casambi App.





LUMINAIRE PHOTOMETRIC

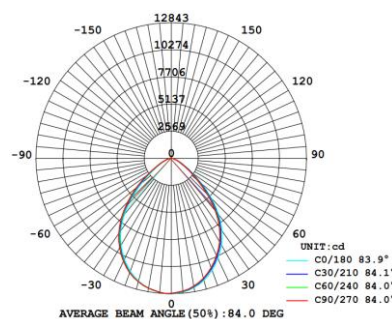

IESNA	LM-63-2002
Light source	LED 2835
Input Watts	150W
Total Lumens	22507.5lm
Efficiency	150LPW
Beam Angle	84 DEG

DIMENSION

Size (mm)	100W	150W	200W	240W
Dia.	308	321	331	385
H	172	174	179	194

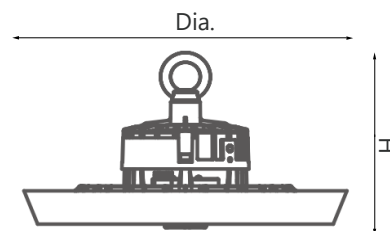

PACKAGING

PART#	UNIT / BOX	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
RHBS-100	1	305 x 305 x 175 mm	3.5 KG	4050	66 CBM	14,189 KG
RHBS-150	1	315 x 315 x 175 mm	3.8 KG	3800	66 CBM	14,443 KG
RHBS-200	1	335 x 335 x 185 mm	4.1 KG	3180	66 CBM	13,033 KG
RHBS-240	1	335 x 335 x 185 mm	4.3 KG	3180	66 CBM	13,669 KG