


UiLED TECHNOLOGY

GOOD People Doing GOOD Work!



We are committed to delivering high quality,
cost-effective, energy-saving LED products for the global market.

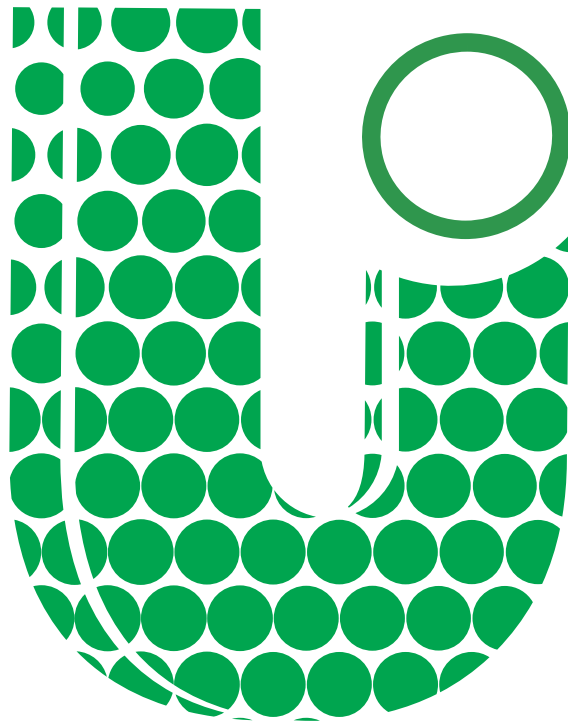

GOOD People Doing GOOD Work!

We are committed to delivering high quality, cost-effective, energy saving products for the global market.

UiLED Technology Ltd.

Founded in 2012 by a team of passionate LED lighting industry professionals with deep expertise in providing multiple services including:

- Products Sourcing and New Product Development
- OEM & ODM Partnership Building
- Quality Control & Factory Audit
- Supply Chain Management

We are dedicated to helping you and your company find sources for high quality, cost-effective energy-saving products for the global market.

"UiLED" philosophy:

We provide customer-oriented products and services. The "U" stands for "you", our customer, who comes first always. And the "i" for our intelligent team who works with you and beside you, supporting your every need, and providing best-in-class service at all times.

"Ui" in written Chinese name "优益" stands for "DOUBLE GOOD", respectively meaning good quality people and beneficiary work. It presents our company philosophy – "Be GOOD People; Do GOOD Work".

"UiLED" name also comes with one of the pronunciations of "Ui" in Chinese -- "special love". We love assisting others in bringing high quality LED solutions and energy-saving products to the global market, making the world brighter, greener, and more efficient.



We are committed to delivering high quality, cost-effective, energy-saving LED products for the global market.

PRODUCTS INDEX

We are committed to delivering high quality, cost-effective, energy saving products for the global market.



INDOOR LIGHTING

LED Ceiling Light Fixtures

- Flush Mount Fixtures
- Recessed Downlights
- Pendant Light Fixtures
- Flat Panels & Troffers

LED Wall Light Fixtures

- Sconces, Bath & Vanity
- Mirror Light

LED Track Lighting Systems

- Track Heads & Kits
- Track Rails and Connectors

LED High Bay

- Round Highbay UFO
- Linear Highbay



OUTDOOR LIGHTING

LED Wall Mount Fixtures

- Wall Packs
- Bulkheads
- Wall Mount Laterns

LED Area and Flood Light Fixtures

- Area Light
- Flood Light
- Portable Work Light

Other Lighting Fixtures

- Solar Lights
- Others



LED FLEXIBLE STRIPS

SMD LED Strips

- Hot Sell Flexible Strips
- High Efficient LED Strips

COB LED Strips - NEW TECHNOLOGY

- Single-color COB LED Strips
- Multi-color COB LED Strips

Flex Neon Strips

- Side-view Flex Neon
- Top-view Flex Neon

Profiles and Accessories

- Connectors & Accessories
- Power Supplies

INDOOR LIGHTING

LED Ceiling Light Fixtures

LED Wall Light Fixtures

LED Track Lighting Systems

LED High Bay


FMC2

Flush Mount Classic 2-ring Ceiling Fixture



FEATURES:

- Flush Mount Classic 2-ring LED Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser
- High efficiency 2835 LED module, up to 100lm/W
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: FMC2-1012-830-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
FMC2				
	10: 10" 12: 12W 15: 15W	8: 80 30: 3000K 9: 90 40: 4000K 50: 5000K	LB: 120V Line Voltage Driver-On Board	BN: Brushed Nickel
	12: 12" 15: 15W 20: 20W	3C: 3000/4000/5000K Selectable	UV: 120 ~ 277V Universal Voltage	ORB: Oil Rubbed Bronze
	16: 16" 35: 35W 40: 40W		UVD: 120~277V Universal Voltage	BK: Black
			TR: Triac Dimming 10V: 0-10V Dimming	
			BLE: BLE MESH Networked Control	


FM2EM

Flush Mount Classic 2-ring Ceiling Fixture Emergency



FEATURES:

- Flush Mount Fixture with Battery Backup
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser
- High efficiency 2835 LED module, up to 100lm/w
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: FM2EM-1212-830-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
FM2EM				
	12: 12" 12: 12W 15: 15W 20: 20W	8: 80 30: 3000K 9: 90 40: 4000K 50: 5000K 3C: 3000/4000/5000K Selectable	LB: 120V Line Voltage Driver-On Board	BN: Brushed Nickel
			TR: Triac Dimming	ORB: Oil Rubbed Bronze
				BK: Black



FEATURES:

- Flush Mount Square Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser
- High efficiency 2835 LED module, up to 100lm/W
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: FMS2-1215-830-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
FMS2				
	12: 12" 15 : 15W 20 : 20W	8 : 80 30: 3000K 9 : 90 40: 4000K 50: 5000K	LB : 120V Line Voltage Driver-On Board	BN: Brushed Nickel ORB: Oil Rubbed Bronze BK: Black
	14: 14" 15 : 15W 20 : 20W	3C : 3000/4000/5000K Selectable	TR: Triac Dimming BLE: Bluetooth Networked Control	

Flush Mount Oval Ceiling Fixture

FMO2



FEATURES:

- Flush Mount Oval Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser
- High efficiency 2835 LED module, up to 100lm/W
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: FMO2-3235-830-LBTR-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
FMO2				
	32: 32" 35 : 35W 40 : 40W 55 : 55W	8 : 80 30: 3000K 9 : 90 40: 4000K 50: 5000K 3C : 3000/4000/5000K Selectable	LB : 120V Line Voltage Driver-On Board UV : 120 ~ 277V Universal Voltage UVD : 120~277V Universal Voltage	BN: Brushed Nickel ORB: Oil Rubbed Bronze BK: Black
			TR: Triac Dimming N :Non-dimmable 10V: 0-10V Dimming	

FMRC

Flush Mount Round Cap Ceiling Fixture



FEATURES:

- Flush Mount Round Cap Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser
- High efficiency 2835 LED module, up to 100lm/W
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




ORDERING GUIDE Example: FMRC-1215-830-LBTR-BW

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
FMRC				
	12: 12" 15 : 15W	8 : 80 30: 3000K	LB : 120V Line Voltage	B-W: Black-White
	15: 15" 20 : 20W	9 : 90 40: 4000K	TR: Triac Dimming	B-G: Black-Gold
	20: 20" 26 : 26W	50: 5000K	Driver-On Board	W-W: White-White
		3C : 3000/4000/5000K Selectable		


FMRF

Flush Mount Round Fabric Ceiling Fixture

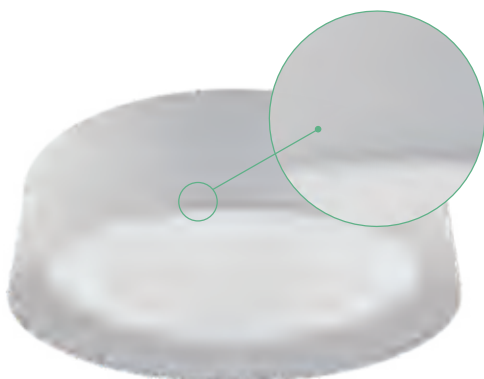

FEATURES:

- Flush Mount Round Fabric Cap Fixture
- Round Fabric Framed Steel Housing with high transmission acrylic diffuser
- High efficiency 2835 LED module, up to 100lm/W
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: FMRF-1615-830-LBTR-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
FMRF				
	16: 16" 15 : 15W	8 : 80 30: 3000K	LB : 120V Line Voltage	WH: White
	20 : 20W	9 : 90 40: 4000K	TR: Triac Dimming	
	26 : 26W	50: 5000K	Driver-On Board	
		3C : 3000/4000/5000K Selectable		

Flush Mount Cloud Ceiling Fixture

FMCL



FEATURES:

- Flush Mount Cloud Ceiling Fixture
- Die-formed cold-rolled steel housing with diffused glass shade creates excellent distribution and uniformity
- High efficiency 2835 LED module, up to 100lm/W
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: FMCL-1112-830-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
FMCL				
	11: 11" 12: 12W 15: 15W	8: 80 30: 3000K 9: 90 40: 4000K 50: 5000K	LB: 120V Line Voltage Driver-On Board	BN: Brushed Nickel
	13: 13" 15: 15W 20: 20W	3C: 3000/4000/5000K Selectable	TR: Triac Dimming	ORB: Oil Rubbed Bronze

Flush Mount Dome Ceiling Fixture

FMDM



FEATURES:

- Flush Mount Cloud Ceiling Fixture
- Die-formed cold-rolled steel housing with diffused glass shade creates excellent distribution and uniformity
- High efficiency 2835 LED module, up to 100lm/W
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: FMDM-712-830-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
FMDM				
	7: 7-1/2" 12: 12W 15: 15W	8: 80 30: 3000K 9: 90 40: 4000K 50: 5000K	LB: 120V Line Voltage Driver-On Board	BN: Brushed Nickel
		3C: 3000/4000/5000K Selectable	TR: Triac Dimming	ORB: Oil Rubbed Bronze
				BK: Black

RD3W5C

3 Wattage and 5 CCT Selectable Downlight



FEATURES:

- Commercial Recessed LED Downlight
- 3 Wattage Output Selectable
- 5 CCT Selectable 27/30/35/40/50/K
- Universal Voltage 120-277V
- 0-10V Dimming, 1-100% dim range
- For Retrofit or New Construction, convenient and easy installation
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RD3W5C-413-85C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RD3W5C				
4: 4"	13 : 7/10/13 Selectable	8: 80 5C: 5CCT Selectable	UV : 120~277V 10V: 0-10V Dimming	WH: White
6: 6"	20 : 10/15/20 Selectable	2700K/3000K/3500K/4000K/5000K	Universal Voltage	
8: 8"	50 : 17/24/30 Selectable			
10: 10"	30 : 22/30/38 Selectable			



RDIJ5C

Integrated J-Box 5 CCT Selectable Downlight



FEATURES:

- Residential Recessed LED Downlight
- With Integrated J-Box, no frame-in or housing required
- 5 CCT Selectable 27/30/35/40/50/K
- 120V Line Voltage Driver-On-Board Solution
- Triac Dimming, 10-100% dim range
- For Retrofit, convenient and easy installation
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDIJ5C-410-85C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RDIJ5C				
4: 4"	10: 10W	8: 80 5C: 5CCT Selectable	LB: 120V TR: Triac Dimming	WH: White
6: 6"	15: 15W	2700K/3000K/3500K/4000K/5000K	Line Voltage DOB Solution	

Retrofit 3 Wattage and 5 CCT Selectable Downlight

RDR3W5C


FEATURES:


- Retrofit Recessed LED Downlight
- 3 Wattage & 5 CCT Selectable
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dimming, 1-100% dim range
- Replaceable Trim for different finish
- Supply with E26 Adapter
- For Retrofit quick installation
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDR3W5C-412-85C-LBTR-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH	
RDR3W5C					
4: 4"	12: 8/10/12 Selectable	8: 80	LB: 120V	TR: Triac Dimming	WH: White
6: 6"	18: 12/15/18 Selectable	9: 90	Line Voltage	DOB Solution	
		5C: 5CCT Selectable			
		2700K/			
		3000K/			
		3500K/			
		4000K/			
		5000K			

ECO Retrofit 5 CCT Selectable Downlight

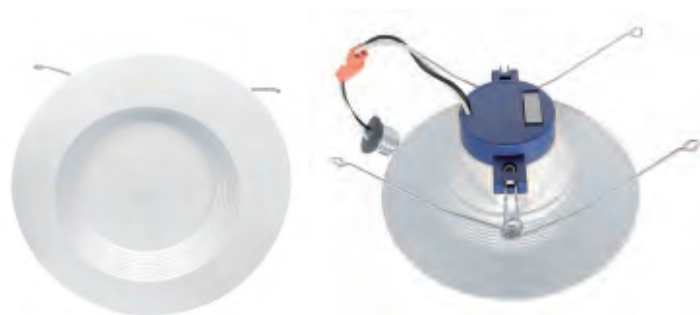RDER5C


FEATURES:

- Retrofit Recessed LED Downlight
- 5 CCT Selectable
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dimming, 1-100% dim range
- Replaceable Trim for different finish
- Supply with E26 Adapter
- For Retrofit quick installation
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDER5C-410-85C-LBTR-WH

PART #	SIZE & WATTAGE (W)		CRI & CCT SELECTABLE (K)		INPUT (V) & CONTROL		FINISH
RDER5C							
	4: 4"	10: 10W	8: 80	5C: 5CCT Selectable	LB: 120V	TR: Triac Dimming	WH: White
	6: 6"	15: 15W	9: 90	2700K/ 3000K/ 3500K/ 4000K/ 5000K	Line Voltage DOB Solution		



RDEL5C

5 CCT Selectable Edgelite Slim Panel Downlight



FEATURES:

- Round Edgelite Slim Panel LED Recessed DownLight
- 5 CCT Selectable 27/30/35/40/50/K
- J-Box Remote, 120V Line Voltage, Triac Dimming, 10-100% dim range
- For Retrofit or New Construction, convenient and quick installation, Spring-action housing clips
- Suitable for using in Wet location, IC & Air-tight application
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDEL5C-409-85C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RDEL5C				
	4: 4" 09: 9W	9: 90 5C: 5CCT Selectable	LB: 120V TR: Triac Dimming	WH: White
	6: 6" 12: 12W	2700K/ 3000K/ 3500K/ 4000K/ 5000K	Line Voltage DOB Solution	



RDSE5C

5 CCT Selectable Edgelite Square Panel Downlight



FEATURES:

- Square Edgelite Slim Panel LED Recessed DownLight
- 5 CCT Selectable 27/30/35/40/50/K
- J-Box Remote, 120V Line Voltage, Triac Dimming, 10-100% dim range
- For Retrofit or New Construction, convenient and quick installation, Spring-action housing clips
- Suitable for using in Wet location, IC & Air-tight application
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RDSE5C-410-85C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RDSE5C				
	4: 4" 10: 10W	9: 90 5C: 5CCT Selectable	LB: 120V TR: Triac Dimming	WH: White
	6: 6" 15: 15W	2700K/ 3000K/ 3500K/ 4000K/ 5000K	Line Voltage DOB Solution	

Round Slim Disk Downlight 5 CCT Selectable

RDD5C



FEATURES:

- Slim Disk downlight, low profile designed for surface mount or retrofit installation
- Cold-rolled steel frame with high transmission PC lens
- Fits into 5/6" recessed can, or 2.75" and 3.5" junction box
- 120V Line Voltage, Flicker free
- Triac Dimming, 5-100%
- ETL listed, suitable for wet location



ORDERING GUIDE

Example: RDD5C-818-95C-LBTR-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RDD5C				
	9: OD 9" 18: 18 W	9: 90 5C: 5CCT Selectable 2700K/ 3000K/ 3500K/ 4000K/ 5000K	LB: 120V Line Voltage DOB Solution TR: Triac Dimming MS: Microwave Motion Sensor	WH: White


Slim Edge Panel Downlight

RDSEP



FEATURES:

- Slim Edge Panel downlight, low profile designed for flush surface mount
- Elegant PC frame with high transmission PC lens
- Fits into 5/6" recessed can, or 2.75" and 3.5" junction box
- 120V Line Voltage, Flicker free
- Triac Dimming, 5-100%
- ETL listed, suitable for wet location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE

Example: RDSEP-918-930-LVTR-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
RDSEP				
	9: OD 9" 18: 18W 18S: 18/15W/10W Field Selectable	9: 90 30: 3000K 40: 4000K 50: 5000K 3C: 30/40/50K Field Selectable	LV: 120V Line Voltage TR: Triac Dimming PR: PIR Sensor	WH: White SI: Silver BK: Black

PMC6

Cylinder Pendant Light Fixture



FEATURES:

- Cylinder Pendant Light Fixture, Robust Aluminum Housing
- Diameter 6", Height 9.8"
- E26 Socket, Par 30 Lamp (included)
- Canopy: D5" H: 1" Round
- 120V Line Voltage,
- Triac Dimming, 10-100% Dim Range
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: PMC6-609-927-UV-BK

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
PMC6				
	6: OD 6" x H 9.8" 09: 9W Par30 Lamp	9: 90 27: 2700K 30: 3000K 40: 4000K	UV: 120V ~ 277V Universal Voltage TR: Triac Dimming	BK: Black


PMC8

Pendant Round Cap Light Fixture



FEATURES:

- Round Cap Pendant Light Fixture, Robust Aluminum Housing
- Diameter 6", Height 9.8"
- E26 Socket, Par 30 Lamp (included)
- Canopy: D5" H: 1" Round
- 120V Line Voltage,
- Triac Dimming, 10-100% Dim Range
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: PMC8-1809-927-UV-BK

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
PMC8				
	18: OD 18" x H15" 09: 9W A19 Bulb	9: 90 27: 2700K 30: 3000K 40: 4000K ble	LB: 120V Line Voltage TR: Triac Dimming	BK: Black


Round Fabric Double Layer Pendant Fixture

PMRF



FEATURES:

- Decorative Fabric Double Layer LED Pendant Light Fixture
- White Fabric Shade and Brushed Metal Ring
- Diameter 22.3" x Height: 6"
- 3 x E26 socket, A19 Bulbs (not included)
- Canopy: D5" H: 1" Round
- 120V Line Voltage, 3 x E26 Socket
- Triac Dimming, 10-100% Dim Range
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: PMRF-2227-927-LV-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
PMRF				
	22: OD 22.3" 27 : 3 x 9W A19	9: 90 27: 2700K 30: 3000K	LV: 120V Line Voltage TR: Triac Dimming	BN: Brushed Nickel WH: White


Dome Pendant Light Fixture

PMDM



FEATURES:

- Decorative LED Dome Sphere Pendant Light Fixture, Anodized Aluminum
- Diameter 22.3" x Height: 6"
- 3 x G9 Base, 5W Lamps (included)
- Canopy: D5" H: 1" Round
- 120V Line Voltage,
- Triac Dimming, 10-100% Dim Range
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: PMDM-1815-927-LV-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
PMDM				
	18: D 13.8" x H 6" 15: 3 x 5W G9 Lamp	9: 90 27: 2700K 30: 3000K	LB: 120V Line Voltage TR: Triac Dimming	AL: Anodized Aluminum

PMD2

Decorative Dome Pendant Fixture



FEATURES:

- Decorative Dome Sphere Pendant Light Fixture
- Metal frame in brass finish and opal glass diffuser
- 4 LED lights up and down, E14/E12
- Size: OD30*H160cm
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: PMD2-1112-927-LVTR-BR

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
PMD2				
	11: OD 11" 12: 4x 3W E14	9: 90 27: 2700K 30: 3000K	LV: 120V Line Voltage TR: Triac Dimming	BR: Brass


PMD5

Decorative Dome Pendant Fixture



FEATURES:

- Decorative Dome Sphere Pendant Light Fixture
- Metal frame in brass finish and opal glass diffuser
- 20 LED lights up and down, E14/E12
- Size: L130*W50*H160cm
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: PMD5-5060-927-LVTR-BR

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
PMD5				
	50: L 50" 60: 20x 3W E14	9: 90 27: 2700K 30: 3000K	LB: 120V Line Voltage TR: Triac Dimming	BR: Brass

INDOOR LIGHTING

LED Flat Panels & Troffers

LED Sconces, Bath Vanities

LED Mirror Lights

LED Track Lights

LED Highbays

BFPS3

Recessed Backlit Flat Panel Selectable W & CCT



FEATURES:

- Recessed Backlit Flat LED Panel
- Extruded aluminum frame with durable steel backing, low profile design
- High transmission glare-free frosted white lens
- 3 Wattage & 3 CCT Selectable
- 120~277V universal voltage
- 0-10V Dimming, High PF, Low THD
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: BFPS3-2235-83C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
BFPS3				
22: 2x4'	35: Selectable 35/30/25W	5075lm	UV: 120~277V Universal Voltage	WH: White
14: 1x4'	35: Selectable 35/30/25W	5075lm	10V: 0-10V Dimming BLE: BLE Mesh Wireless Control	
24: 2x4'	40: Selectable 40/35/30W	5800lm		
		8: 80 3C: 3 CCT Selectable 3000K/ 4000K/ 5000K		


TRS3

Recessed Architectural LED Troffer Selectable W & CCT



FEATURES:

- Recessed Center Basket LED Troffer
- Extruded aluminum frame with durable steel backing, low profile design
- High transmission glare-free frosted white lens
- 3 Wattage & 3 CCT Field Selectable
- 120~277V universal voltage
- 0-10V Dimming, High PF, Low THD
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: TRS3-2235-83C-UV10V-WH

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
TRS3				
22: 2x4'	35: Selectable 35/30/25W	5600lm	UV: 120~277V Universal Voltage	WH: White
14: 1x4'	35: Selectable 35/30/25W	5600lm	10V: 0-10V Dimming BLE: BLE Mesh Wireless Control	
24: 2x4'	40: Selectable 40/35/30W	6400lm		
		8: 80 3C: 3CCT Selectable 9: 90 3000K/ 4000K/ 5000K		

Wall Mount Sconce Vertical Fixture

WSV1



FEATURES:

- Vertical Sconce Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission plastic diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: WSV1-709-827-LBTR-BN

PART

WSV1

SIZE & WATTAGE (W)

7: 7x10" 09: 9W
12: 12W
15: 15W

CRI & CCT (K)

8: 80 27: 2700K
30: 3000K
40: 4000K
50: 5000K
3C: 3000/4000/5000K
Selectable

INPUT (V) & CONTROL

LB: 120V Line Voltage
Driver-On Board

TR: Triac Dimming

FINISH

BN: Brushed Nickel

ORB: Oil Rubbed
Bronze

BK: Black


Wall Mount Sconce Vertical Fixture

WSV2



FEATURES:

- Vertical Sconce Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission plastic diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: WSV2-712-827-LBTR-BN

PART

WSV2

SIZE & WATTAGE (W)

7: 7-1/2x12-1/4" 12: 12W
15: 15W
17: 17W

CRI & CCT (K)

8: 80 27: 2700K
30: 3000K
40: 4000K
50: 5000K
3C: 3000/4000/5000K
Selectable

INPUT (V) & CONTROL

LB: 120V Line Voltage
Driver-On Board

TR: Triac Dimming

FINISH

BN: Brushed Nickel

ORB: Oil Rubbed
Bronze

BK: Black

UV: 120 ~ 277V
Universal Voltage

TR: Triac Dimming
at 120V only

BK: Black


WSS1

Wall Mount Sconce Semicircle Fixture



FEATURES:

- Semicircle Sconce Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission glass diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: WSS1-1512-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WSS1				
	15: 15x 7-1/2" 12: 12W	8 : 80 27: 2700K	LB : 120V Line Voltage	BN: Brushed Nickel
	15: 15W	9 : 90 30: 3000K	TR: Triac Dimming	ORB: Oil Rubbed Bronze
	17: 17W	40: 4000K	Driver-On Board	
		50: 5000K		
		3C : 3000/4000/5000K Selectable		


WSS2

Wall Mount Sconce Semicircle Fixture



FEATURES:

- Semicircle Sconce Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission glass diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: WSS2-1612-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
WSS2				
	16: 16-1/2 x 8" 12: 12W	8 : 80 27: 2700K	LB : 120V Line Voltage	BN: Brushed Nickel
	15: 15W	9 : 90 30: 3000K	TR: Triac Dimming	ORB: Oil Rubbed Bronze
	17: 17W	40: 4000K	Driver-On Board	
		50: 5000K		
		3C : 3000/4000/5000K Selectable		


Wall Mount Sconce Brick Clean

WSB1



FEATURES:

- Clean Brick Sconce Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission glass diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: WSB1-806-827-LBTR-BN

PART #

SIZE & WATTAGE (W)

CRI & CCT (K)

WSB1

8: 8x8" 06 : 6W
09 : 09W
12 : 12W

8 : 80 27: 2700K
9 : 90 30: 3000K
40: 4000K
50: 5000K

INPUT (V) & CONTROL

FINISH

LB : 120V Line Voltage TR: Triac Dimming
Driver-On Board

BN: Brushed Nickel
ORB: Oil Rubbed Bronze

Wall Mount Sconce Cup Fancy

WSC1



FEATURES:

- Fancy Cup Sconce Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission glass diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: WSC1-806-827-LBTR-BN

PART #

SIZE & WATTAGE (W)

CRI & CCT (K)

WSC1

8: 8x8" 06 : 6W
09 : 09W
12 : 12W

8 : 80 27: 2700K
9 : 90 30: 3000K
40: 4000K
50: 5000K
3C : 3000/4000/5000K
Selectable

INPUT (V) & CONTROL

FINISH

LB : 120V Line Voltage TR: Triac Dimming
Driver-On Board

BN: Brushed Nickel
ORB: Oil Rubbed Bronze

VAC1

Bath Vanity Classic Wall Mount Fixture



FEATURES:

- Classic Bath Vanity Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission plastic diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: VAC1-225-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
VAC1				
2 : L 2'	25 : 25W	8 : 80 30 : 3000K	LB : 120V Line Voltage Driver-On Board	BN: Brushed Nickel
3 : L 3'	30 : 30W	9 : 90 40 : 4000K	UV : 120 ~ 277V Universal Voltage	ORB: Oil Rubbed Bronze
4 : L 4'	40 : 40W	50 : 5000K 3C : 3000/4000/5000K Selectable	UVD : 120~277V Universal Voltage	
			TR: Triac Dimming N : Non Dimming 10V: 0-10V Dimming	



VAS2

Bath Vanity Classic Wall Mount Fixture



FEATURES:

- Classic Bath Vanity Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission plastic diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: VAS2-225-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
VAS2				
2 : L 2'	25 : 25W	8 : 80 30 : 3000K	LB : 120V Line Voltage Driver-On Board	BN: Brushed Nickel
3 : L 3'	30 : 30W	9 : 90 40 : 4000K	UV : 120 ~ 277V Universal Voltage	ORB: Oil Rubbed Bronze
4 : L 4'	40 : 40W	50 : 5000K 3C : 3000/4000/5000K Selectable	UVD : 120~277V Universal Voltage	
			TR: Triac Dimming N : Non Dimming 10V: 0-10V Dimming	

Bath Vanity Fixture Design Series

VAD3



FEATURES:

- Design Bath Vanity Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission plastic diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: VAD3-225-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
VAD3				
	2 : L 2' 25 : 25W	8 : 80 30: 3000K	LB : 120V Line Voltage Driver-On Board	BN: Brushed Nickel
	3 : L 3' 30 : 30W	9 : 90 40: 4000K	UV : 120 ~ 277V Universal Voltage	ORB: Oil Rubbed Bronze
	4 : L 4' 40 : 40W	3C : 3000/4000/5000K Selectable	UVD : 120~277V Universal Voltage	
			TR: Triac Dimming	
			N : Non Dimming	
			10V: 0-10V Dimming	


Bath Vanity Fixture Design Series

VAD4



FEATURES:

- Design Bath Vanity Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission plastic diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




ORDERING GUIDE Example: VAD4-225-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
VAD4				
	2 : L 2' 25 : 25W	8 : 80 30: 3000K	LB : 120V Line Voltage Driver-On Board	BN: Brushed Nickel
	3 : L 3' 30 : 30W	9 : 90 40: 4000K	UV : 120 ~ 277V Universal Voltage	ORB: Oil Rubbed Bronze
	4 : L 4' 40 : 40W	3C : 3000/4000/5000K Selectable	UVD : 120~277V Universal Voltage	
			TR: Triac Dimming	
			N : Non Dimming	
			10V: 0-10V Dimming	



FEATURES:

- Design Bath Vanity Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission plastic diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




ORDERING GUIDE Example: VAD1-225-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
VAD1				
	2 : L 2' 25 : 25W	8 : 80 30 : 3000K	LB : 120V Line Voltage Driver-On Board	BN: Brushed Nickel
	3 : L 3' 30 : 30W	9 : 90 40 : 4000K	UV : 120 ~ 277V Universal Voltage	ORB: Oil Rubbed Bronze
	4 : L 4' 40 : 40W	3C : 3000/4000/5000K Selectable	TR: Triac Dimming N : Non Dimming 10V: 0-10V Dimming	



FEATURES:

- Design Bath Vanity Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission plastic diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: VAD2-225-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
VAD2				
	2 : L 2' 25 : 25W	8 : 80 30 : 3000K	LB : 120V Line Voltage Driver-On Board	BN: Brushed Nickel
	3 : L 3' 30 : 30W	9 : 90 40 : 4000K	UV : 120 ~ 277V Universal Voltage	ORB: Oil Rubbed Bronze
	4 : L 4' 40 : 40W	3C : 3000/4000/5000K Selectable	UVD : 120~277V Universal Voltage TR: Triac Dimming N : Non Dimming 10V: 0-10V Dimming	

Wall Mount Sconce Design Tube

WSDT



FEATURES:

- Design Tube Sconce Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission crystal diffuser
- 120 degree beam angle
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD, Flicker Free
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: WSB1-806-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
WSDT				
	1L: 1L 5" 08: 8W	8: 80 27: 2700K	LB: 120V Line Voltage	BN: Brushed Nickel
	2L: 2L 9.5" 15: 15W	9: 90 30: 3000K	TR: Triac Dimming	ORB: Oil Rubbed Bronze
		40: 4000K	Driver-On Board	CH: Chrome

Wall Mount Sconce Design Tube

WSDT



FEATURES:

- Design Tube Sconce Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission crystal diffuser
- 120 degree beam angle
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD, Flicker Free
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: WSC1-806-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	FINISH
WSDT				
	3L: 3L 15" 22: 22W	8: 80 27: 2700K	LB: 120V Line Voltage	BN: Brushed Nickel
		9: 90 30: 3000K	TR: Triac Dimming	ORB: Oil Rubbed Bronze
		40: 4000K	Driver-On Board	


WMS1

Wall Mount Bath Mirror Light



FEATURES:

- Morden Design LED Mirror Light Fixture
- High Quality Mirror
- High efficiency 2835 LED Strip
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for wet location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: VAD3-225-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	VERSION
WMS1				
	2 : L 2' 25 : 25W	8 : 80 27: 2700K	LB : 120V Line Voltage Driver-On Board	TR: Triac Dimming
	3 : L 3' 30 : 30W	9 : 90 30: 3000K	UV : 120 ~ 277V Universal Voltage	N : Non Dimming
	4 : L 4' 40 : 40W	50: 5000K	UVD : 120~277V Universal Voltage	10V: 0-10V Dimming
		3C : 3000/4000/5000K Selectable		TS: Touch Switch
				TM: Time Display

WMR1

Wall Mount Bath Mirror Light



FEATURES:

- Design Bath Vanity Wall Mount Fixture
- Die-formed cold-rolled steel housing with high transmission plastic diffuser
- High efficiency 2835 LED module
- Triac Dimming, 1-100% dim range
- High Power Factory, Low THD
- Suitable for wet location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: VAD4-225-827-LBTR-BN

PART #	SIZE & WATTAGE (W)	CRI & CCT SELECTABLE (K)	INPUT (V) & CONTROL	VERSION
VAD4				
	24 : 24" 20 : 20W	8 : 80 27: 2700K	LB : 120V Line Voltage Driver-On Board	TR: Triac Dimming
	30 : 30" 25 : 25W	9 : 90 30: 3000K	UV : 120 ~ 277V Universal Voltage	N : Non Dimming
		40: 4000K		10V: 0-10V Dimming
		50: 5000K		TS: Touch Switch
				TM: Time Display

LED Track Light - Flexible Track Kit

TK5A



FEATURES:

- Flexible Track Light Kit
- 9ft, 5 Lamp Shade, Metal Shade
- 5-7W GU10 LED Bulbs included,
- 120V Line Voltage
- 0-10V Dimming, 10-100% dim range
- ETL Listed, Suitable for damp location
- 50,000H @ L70 Long Lifetime
- 5 years Warranty



ORDERING GUIDE Example: TK5A-9535-827-LV-SN

PART #	SIZE & LIGHTS	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
TK5A				
	9: L 9ft 5 : 5 Gu10 Lamp	8 : 80 27: 2700K	LV : 120V Line Voltage N : Non Dimming	SN: Satin Nickel
	25: 25W	9 : 90 30: 3000K	TR: Triac Dimming	CH: Chrome
	35: 35W	40: 4000K		


LED Track Light - Flexible Track Kit

TK5B



FEATURES:

- Flexible Track Light Kit
- 9ft, 5 Lamp Shade, Metal Shade
- 5-7W GU10 LED Bulbs included,
- 120V Line Voltage
- 0-10V Dimming, 10-100% dim range
- ETL Listed, Suitable for damp location
- 50,000H @ L70 Long Lifetime
- 5 years Warranty



ORDERING GUIDE Example: TK5A-9535-827-LV-SN


PART #	SIZE & LIGHTS	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
TK5B				
	9: L 9ft 5 : 5 Gu10 Lamp	8 : 80 27: 2700K	LV : 120V Line Voltage N : Non Dimming	SN: Satin Nickel
	25: 25W	9 : 90 30: 3000K	TR: Triac Dimming	CH: Chrome
	35: 35W	40: 4000K		

THPC

LED Track Light - Track Head Premium Cylinder



Optional Optical Accessories:

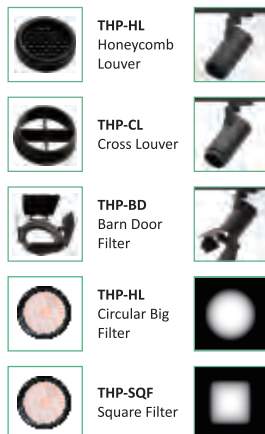

FEATURES:

- Stylish and compact cylinder design with integrated LED driver.
- Die-cast aluminum housing optimizes thermal management
- Modular features comply with different optical accessories for custom lighting applications.
- Proprietary joint allows 360° horizontal rotation adjustment and 90° vertical aiming.
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: THPC-103P-827-LV10V-BK


PART #	WATTAGE (W) & ADAPTER VERSION	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
THPC				
	10 : 10W 3P : 3 Pin Track Adapter	8 : 80 27: 2700K	LV : 120V Line Voltage 10V: 0-10V Dimming	BK: Black
	20 : 20W 4P : 4 Pin Track Adapter	9 : 90 30: 3000K		WH: White
	25 : 25W	40: 4000K		
	30 : 30W	50: 5000K		

THWW

LED Track Light - Track Head Wall Washer



Optional Optical Accessories:

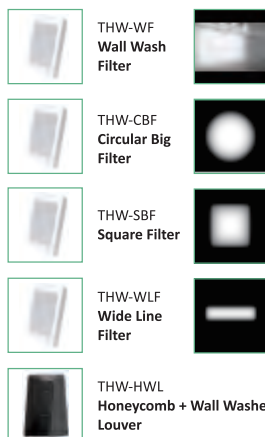

FEATURES:

- Stylish and compact square head design.
- Die-cast aluminum housing optimizes thermal management
- Modular design that combines wall-washing, spotlights and floodlight optical solutions for custom lighting applications.
- Proprietary joint allows 360° horizontal rotation adjustment and 90° vertical aiming.
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: THWW-303P-827-UV10-BK

PART #	WATTAGE (W) & ADAPTER VERSION	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
THWW				
	30 : 30W 3P : 3 Pin Track Adapter	8 : 80 27: 2700K	UV : 120~277V 10V: 0-10V Dimming	BK: Black
	35 : 35W 4P : 4 Pin Track Adapter	9 : 90 30: 3000K	Universal Voltage	WH: White
		40: 4000K		
		50: 5000K		


Track Rail 3-Wire Single Circuit

TR3



FEATURES:

- Extruded Robust Aluminum Track Rail
- High quality cooper trace x3
- 3-Wire Single Circuit, Max. current load up to 12amps per ft
- Surface mount or recessed mount version optional
- Patent Mount Accessories Available
- Suitable for damp location



ORDERING GUIDE Example: TR3-2SM-1EE-WH

PART #	SIZE & VERSION	CIRCUIT &	ENDS SEAL	FINISH
TR3				
	2 : 2ft	SM : Surface Mount	S : Single Circuit	EE: With Two End Caps
	4 : 4ft	RM : Recessed Mount		LE: With Live-End & End Cap
	6 : 6ft			WH : White
	8 : 8ft			BK : Black
	10: 10ft			

Track Rail 4-Wire 3-Circuit / Single Phase or 3-Phase

TR4



FEATURES:

- Extruded Robust Aluminum Track Rail
- High quality cooper trace x3
- 4-Wire 3-circuit 1-phase or 3-phase, Max. current load up to 12amps per ft
- Surface mount or recessed mount version optional
- Patent Mount Accessories Available
- Suitable for damp location



ORDERING GUIDE Example: TR4-2SM-SEE-WH

PART #	SIZE & VERSION	CIRCUIT &	ENDS SEAL	FINISH
TR4				
	2 : 2ft	SM : Surface Mount	3S : 3-circuit Single Phase	EE: With Two End Caps
	4 : 4ft	RM : Recessed Mount	33 : 3-circuit 3-Phase	LE: With Live-End & End Cap
	6 : 6ft			WH : White
	8 : 8ft			BK : Black
	10: 10ft			



FEATURES:

- Robust die-cast aluminum housing with advanced thermal management
- High transmission PC lens provides protection and high light output
- Clear PC or Aluminum dome reflector available
- Multiple distribution 60/90/120°
- Pluggable Motion Sensor or BLE MESH Sensor
- IP65 Suitable for using in wet location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: RHBS-100-8SC-UV10V-BK

PART #	WATTAGE (W)	LUMEN	EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
RHBS						
100: Selectable 100-80-60W	15000lm	150lm/W	8: 80 SC: Selectable 3000K/ 4000K/ 5000K	UV: 120-277V Universal Voltage HV: 120-347V High Voltage	10V: 0-10V Dimming EM: Emergency Battery Backup	BK: Black WT: WHITE
150: Selectable 150-120-100W	22500lm	150lm/W				
200: Selectable 200-150-120W	30000lm	150lm/W				
240: Selectable 240-200-150W	37500lm	150lm/W				



FEATURES:

- Robust die-cast aluminum housing with advanced thermal management
- High transmission PC lens provides protection and high light output
- Clear PC or Aluminum dome reflector available
- Multiple distribution 60/90/120°
- Pluggable Motion Sensor or BLE MESH Sensor
- IP65 Suitable for using in wet location
- 50,000H @ L70 Long Lifetime




ORDERING GUIDE Example: RHBHE-100-840-UV10V-BK

PART #	WATTAGE (W)	LUMEN	EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
RHBHE						
100: Selectable 100-80-60W	19000lm	190lm/W	8: 80 40: 4000K 50: 5000K	UV: 120-277V Universal Voltage HV: 120-347V High Voltage	10V: 0-10V Dimming BLE: BLE Mesh Networked Control	BK: Black WT: WHITE
150: Selectable 150-120-100W	28500lm	190lm/W				
200: Selectable 200-150-120W	38000lm	190lm/W				
240: Selectable 240-200-150W	43200lm	180lm/W				

Linear Highbay Selectable Watt & CCT

LHBS

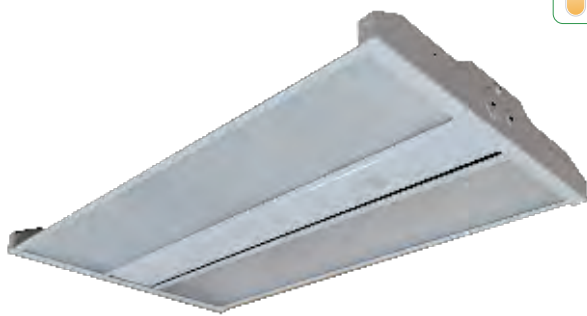

FEATURES:

- Die form cold-rolled steel housing , excellent heat dissipation
- High transmission PC lens provides protection and high light output
- Wide distribution 120° beam angle
- 120-277V or 120-347V wide range input voltage
- DLC Premium Qualified
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




ORDERING GUIDE Example: LHBS-115S2-8SC-UV10V-WT

PART #	WATTAGE (W)	LUMEN	EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
LHBS						
115: Selectable 115-92-78W	17250lm	150lm/W	8: 80	SC: Selectable 3000K/ 4000K/ 5000K	UV: 120-277V Universal Voltage	10V: 0-10V Dimming EM: Emergency Battery backup
200: Selectable 200-185-155W	30000lm	150lm/W				WT: WHITE
400: Selectable 400-360-270W	60000lm	150lm/W				

Linear Highbay Networked Control

LHBNC

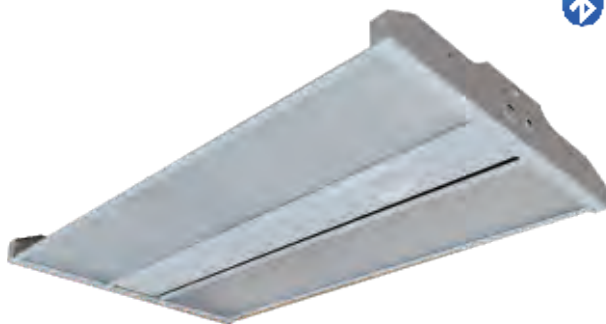

FEATURES:

- Die form cold-rolled steel housing , excellent heat dissipation
- High transmission PC lens provides protection and high light output
- Wide distribution 120° beam angle
- 120-277V or 120-347V wide range input voltage
- DLC Premium Qualified
- Suitable for damp location
- 50,000H @ L70 Long Lifetime



ORDERING GUIDE Example: LHBNC-115-8SC-UV10V-WT

PART #	WATTAGE (W)	LUMEN	EFFICACY	CRI & CCT (K)	INPUT (V) & CONTROL	FINISH
LHBNC						
115: Selectable 115-92-78W	17250lm	150lm/W	8: 80	SC: Selectable 3000K/ 4000K/ 5000K	UV: 120-277V Universal Voltage	10V: 0-10V Dimming BLE: BLE Mesh Networked Control
200: Selectable 200-185-155W	30000lm	150lm/W				WT: WHITE
400: Selectable 400-360-270W	60000lm	150lm/W				